

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>60909</b><br><b>W29A</b> | APP CRS<br><b>291°</b> | Rwy Ldg <b>6525</b><br>TDZE <b>871</b><br>Apt Elev <b>871</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 29

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

▼



▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using General Downing-Peoria Intl altimeter setting. When local altimeter setting not received, use General Downing-Peoria Intl altimeter setting: increase all DA 116 feet and all MDA 120 feet; increase LPV all Cats visibility to RVR 3500, LNAV/VNAV all Cats and LNAV Cats C/D visibility ¾ mile, and Circling Cats C/D visibility ¼ mile. For inoperative MALSRs when using General Downing-Peoria Intl Regional altimeter setting increase LPV all Cats visibility ½ mile, and LNAV Cat C/D visibility ¾ mile.

MALSR

MISSED APPROACH:  
Climb to 2500 direct  
ZEXED and hold.

|                        |                                             |                                                    |                          |                         |
|------------------------|---------------------------------------------|----------------------------------------------------|--------------------------|-------------------------|
| ATIS<br><b>119.575</b> | SAINT LOUIS APP CON<br><b>128.725 256.9</b> | BLOOMINGTON TOWER ★<br><b>124.6 (CTAF) 269.575</b> | GND CON<br><b>121.65</b> | UNICOM<br><b>122.95</b> |
|------------------------|---------------------------------------------|----------------------------------------------------|--------------------------|-------------------------|

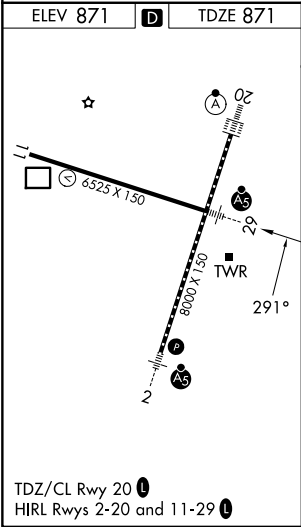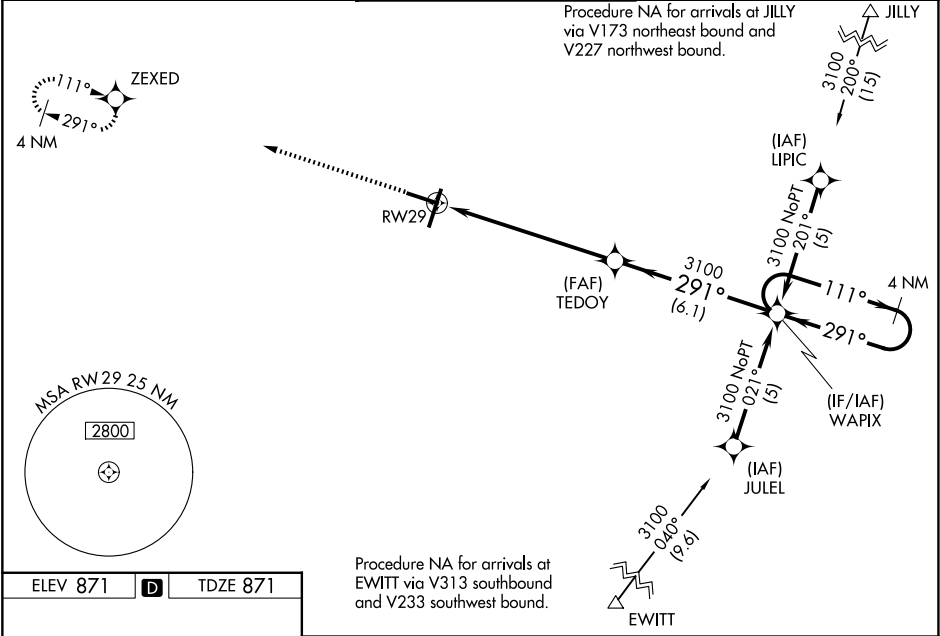

2500 ZEXED

TEDOY 3100

WAPIX

4 NM Holding Pattern

111° 3100

291° 3100

GP 3.00° TCH 56

\*LNAV only

\*1.6 NM to RW29

| CATEGORY     | A                   | B           | C                       | D                       |
|--------------|---------------------|-------------|-------------------------|-------------------------|
| LPV DA       | 1121/24 250 (300-½) |             |                         |                         |
| LNAV/VNAV DA | 1304/50 433 (500-1) |             |                         |                         |
| LNAV MDA     | 1460/24             | 589 (600-½) | 1460-1¼                 | 589 (600-1¼)            |
| CIRCLING     | 1460-1              | 589 (600-1) | 1620-2¼<br>749 (800-2¼) | 1620-2½<br>749 (800-2½) |