

VOR TBN <u>110.0</u>	APP CRS 138°	Rwy Ldg 5535 TDZE 1158 Apt Elev 1160
--------------------------------	------------------------	---

VOR RWY 15
WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

Procedure NA when R-4501B or R-4501H in use. Inop table does not apply to S-15 Cat A and B or to ZUTMA fix minimums. Circling NA west of Rwy 15-33. When local altimeter setting not received, use Rolla Ntl altimeter setting and increase all MDA's 80 feet and increase S-15 visibility Cats C/D $\frac{1}{4}$ SM and Circling Cat C visibility $\frac{1}{8}$ SM. Inop table does not apply to Cats A/B when using Rolla Ntl altimeter setting. For inop A/Bs when using Rolla Ntl altimeter setting increase S-15 Cats C/D visibility to $\frac{1}{4}$ SM. For inop A/Bs when using Rolla Ntl altimeter setting increase S-15 ZUTMA fix minimums Cats C/D visibility to $\frac{1}{8}$ SM. #DME from I-TBN LOC/DME.

MALSR


MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on TBN VOR R-323 to REBBS INT/I-TBN LOC/DME 11 DME and hold.

D-ATIS	
118.7	229.4

KANSAS CITY CENTER
128.35 284.675

FORNEY TOWER ★
125.4 (CTAF) **L** 268.7

GND CON
123.75 256.8

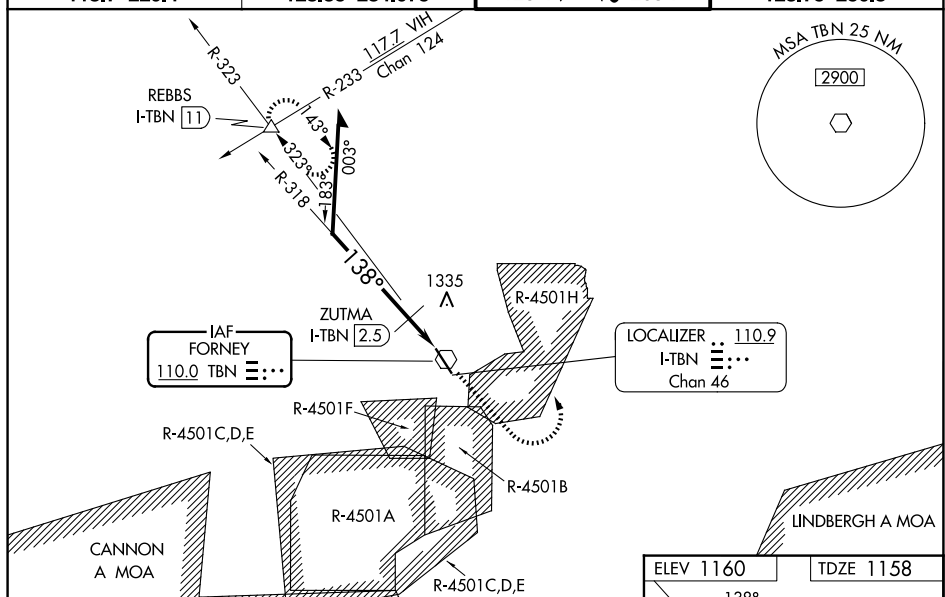

Remain within 10 NM

2800

318°

ZUTMA

I-TBN (2.5)

3.00°

TCH 50

I-TBN (1.9)

*1780

0.6 NM

1 NM

TBN VOR

2000

3000

4000

TBN R-323

* 1780 when using Rolla Ntl alimeter setting.

CATEGORY	A	B	C	D
S-15	1700-1	542 (600-1)	1700-1½	542 (600-1½)
CIRCLING	1700-1	540 (600-1)	1700-1½ 540 (600-1½)	1720-2 560 (600-2)

ZUTMA FIX MINIMUMS #

S-15	1520-1	362 (400-1)		
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)

