

VOR TBN
110.0

APP CRS
329°

Rwy Ldg
5510

TDZE
1153

Apt Elev
1160

VOR RWY 33

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)


DME or RADAR required. RADAR required for procedure entry.

When local altimeter not received, use Rolla Ntl altimeter setting and increase all MDAs 80 feet. Increase S-33 Cats C/D visibility to 1¼ SM. Procedure NA when R-4501B or R-4501H in use. Circling NA west of Rwy 15-33. Rwy 33 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to Cats A and B. For inop ALS, increase Cats C and D visibility to 1¾ SM. Inop table does not apply to Cats A and B when using Rolla Ntl altimeter setting.

MALS

MISSED APPROACH: Climb to 3000 on TBN VOR R-323 to REBBS INT/I-TBN LOC/DME 11 DME and hold.

D-ATIS 118.7 229.4	KANSAS CITY CENTER 128.35 284.675	FORNEY TOWER ★ 125.4 (CTAF) 0 268.7	GND CON 123.75 256.8
-----------------------	--------------------------------------	--	-------------------------

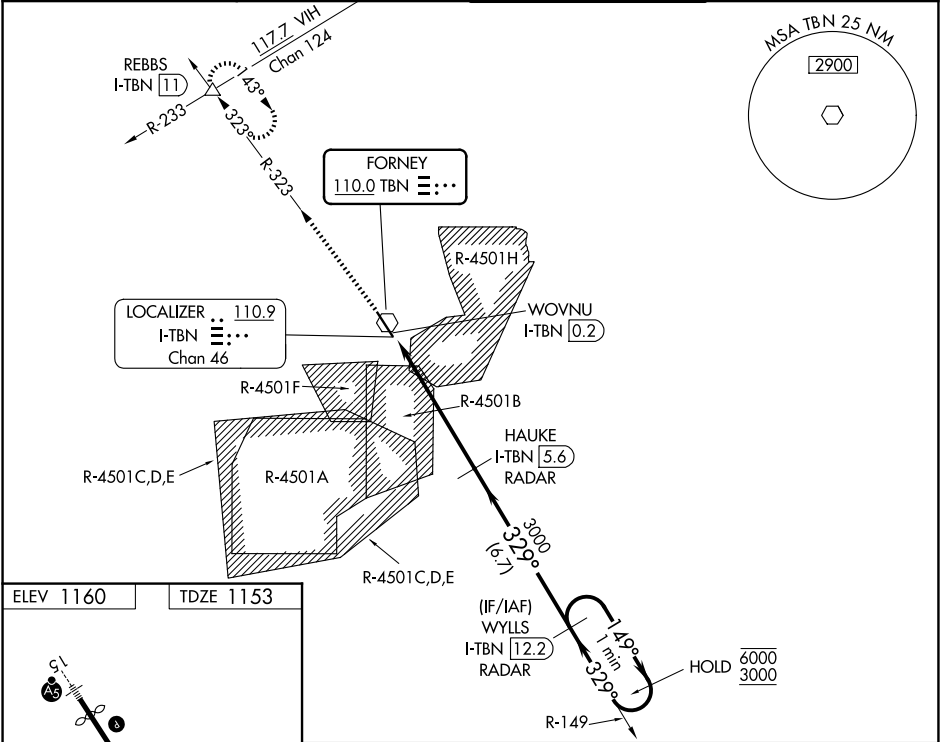

ELEV 1160

TDZE 1153

3000

REBBS

TBN R-323

I-TBN DME ANTENNA

WOVNU I-TBN 0.2

I-TBN 1.2

HAUKE I-TBN 5.6 RADAR

WYLLS I-TBN 12.2 RADAR

One Minute Holding Pattern

3000

329°

149°

6000

3000

3.00°

TCH 36

1.3 NM

4.4 NM

6.7 NM

CATEGORY	A	B	C	D
S-33	1600-1 447 (500-1)			
CIRCLING	1600-1 440 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-½)	1720-2 560 (600-2)