


WAAS CH 45522 W09A	APP CRS 090°	Rwy Ldg TDZE 707 Apt Elev 712	6501
--	------------------------	---	-------------

RNAV (GPS) RWY 9

AURORA MUNI (ARR)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 2500 direct HOGIE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.				
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER ★ 120.6 (CTAF) 0	GND CON 121.7	

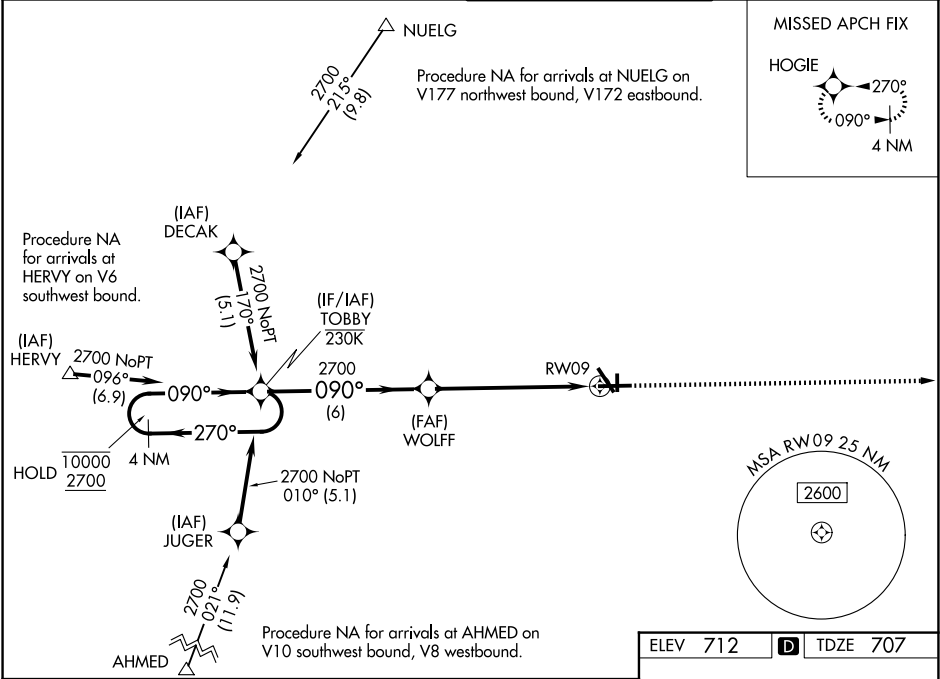

4 NM Holding Pattern		TOBBY	WOLFF	2500	HOGIE
10000 2700		2700	2700	2700	*LNAV only.
GP 3.00° TCH 45		2700	2700	2700	*1.5 NM to RWY 09
6 NM		4.6 NM	1.5 NM	RWY 09	
CATEGORY	A	B	C	D	
LPV DA	957-½		250 (300-½)		
LNAV/VNAV DA	1035-½		328 (400-½)		
LNAV MDA	1220-½	513 (600-½)	1220-1	513 (600-1)	
CIRCLING	1220-1	508 (600-1)	1300-1½ 588 (600-1½)	1320-2 608 (700-2)	

