

WAAS CH 53516 W22A	APP CRS 219°	Rwy Ldg TDZE 666 Apt Elev 674
--	------------------------	---

RNAV (GPS) RWY 22

BATTEN INTL (RAC)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use MKE altimeter setting and increase LPV DA to 984 feet; increase LNAV/VNAV DA to 1032 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. Circling Rwy 14, 22, 32 NA at night. Rwy 22 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using MKE altimeter setting. Straight-in Rwy 22 NA at night.

MISSED APPROACH:
Climb to 3000 direct UCLID and track 277° to VEENA and hold.

ASOS 121.425	MILWAUKEE APP CON 135,875 317.725	CLNC DEL 120.15	UNICOM 123.075 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

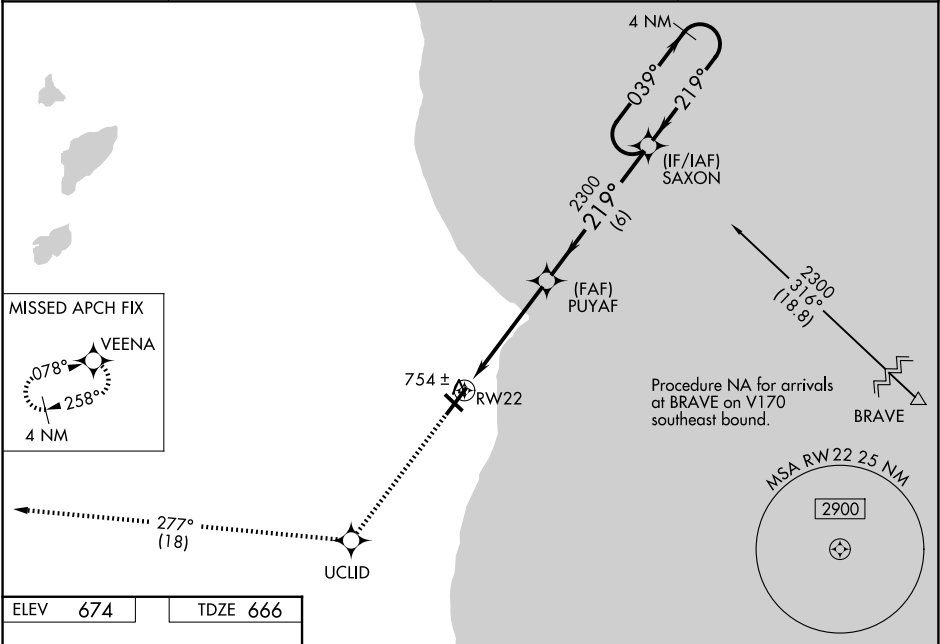

ELEV 674

TDZE 666

219°

3000

UCLID

tr 277°

VEENA

PUYAF

SAXON

4 NM Holding Pattern

2300

219°

039°

2300

219°

GP 3.00° TCH 55

4.9 NM

6 NM

14

22

32

6571 X 100

4421 X 100

0.35° UP

742

HIRL Rwy 4-22 0

MIRL Rwy 14-32 0

REIL Rws 14, 22 and 32 0

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).				
CATEGORY	A	B	C	D
LPV DA	949-1		283 (300-1)	
LNAV/VNAV DA	997-1		331 (400-1)	
LNAV MDA	1080-1	414 (500-1)	1080-1½	414 (500-1½)
CIRCLING	1140-1 466 (500-1)	1160-1 486 (500-1)	1380-2 706 (800-2)	1380-2¼ 706 (800-2¼)