


|         |       |         |          |      |
|---------|-------|---------|----------|------|
| LOC/DME | I-ESC | APP CRS | Rwy Idg  | 6498 |
| 109.3   |       | 276°    | TDZE     | 596  |
| Chan 30 |       |         | Apt Elev | 609  |

LOC BC RWY 28


DELTA COUNTY (ESC)


|                                                       |                                                                             |
|-------------------------------------------------------|-----------------------------------------------------------------------------|
| DME required.                                         | MISSED APPROACH: Climb to 2500 then right turn direct ESC VOR/DME and hold. |
| Rwy 28 helicopter visibility reduction below ¾ SM NA. |                                                                             |

|                     |                              |                          |
|---------------------|------------------------------|--------------------------|
| AWOS-3PT<br>121.425 | MINNEAPOLIS CENTER<br>127.65 | UNICOM<br>122.8 (CTAF) 0 |
|---------------------|------------------------------|--------------------------|

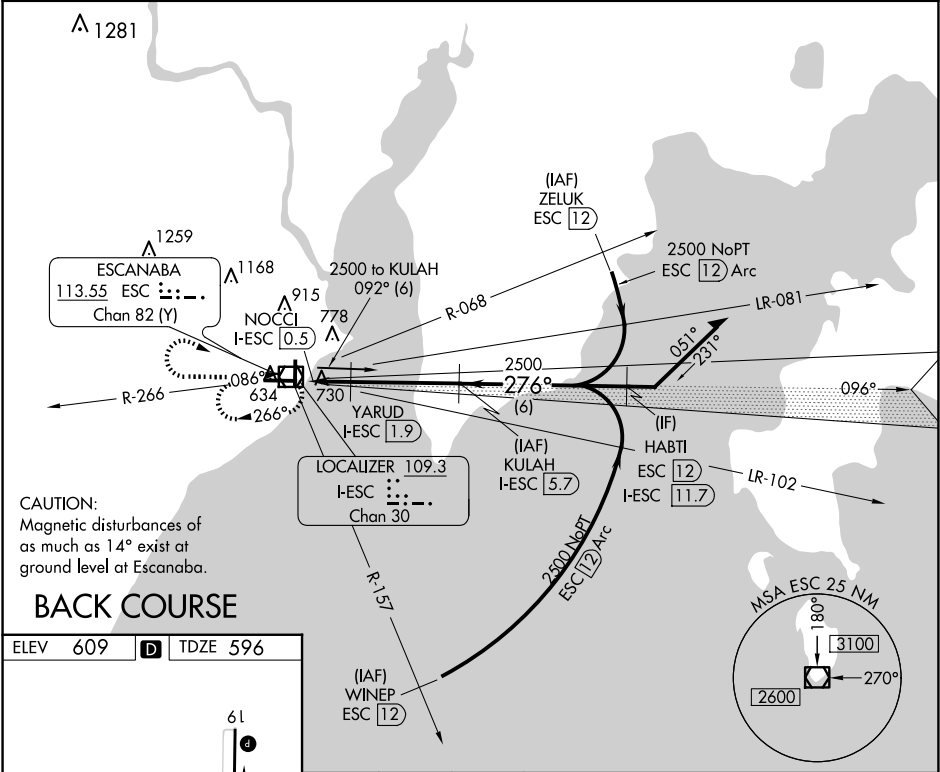

BACK COURSE

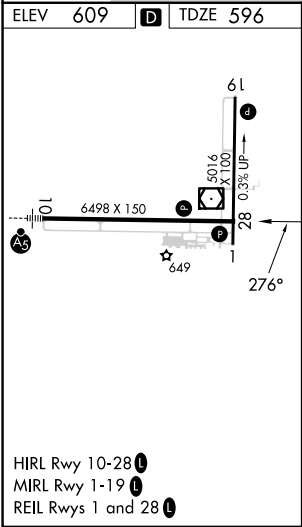

|                                                                                     |  |                                                                                     |  |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|
|  |  |  |  |
| ESC<br>VOR/DME                                                                      |  | YARUD<br>I-ESC 1.9                                                                  |  |
| NOCCI<br>I-ESC 0.5                                                                  |  | KULAH<br>I-ESC 5.7                                                                  |  |
|  |  |  |  |
| I-ESC 1.1                                                                           |  | 2500                                                                                |  |
| 0.7                                                                                 |  | 0.8                                                                                 |  |
| 0.6                                                                                 |  | 3.8 NM                                                                              |  |
| CATEGORY                                                                            |  | A                                                                                   |  |
| S-28                                                                                |  | 1040-1 444 (500-1)                                                                  |  |
| CIRCLING                                                                            |  | 1060-1 1080-1 1280-2 1480-2 3/4                                                     |  |
| 451 (500-1)                                                                         |  | 471 (500-1) 671 (700-2) 871 (900-2 3/4)                                             |  |