

LOC HBE
110.9

APP CRS
236°

Rwy Ldg
7372
TDZE
1145
Apt Elev
1199

ILS or LOC RWY 24
ARNOLD PALMER RGNL (LBE)

RNAV 1-GPS or RADAR required for procedure entry.
From IGOCL: RNAV 1-GPS required.
RADAR required.

MALSR
AS


MISSED APPROACH: Climb to 2000
then climbing right turn to 5000
direct AGC VOR/DME and hold.

ATIS
118.375

JOHNSTOWN APP CON ★
121.2 299.2

PALMER TOWER ★
125.0 (CTAF) 0


GND CON
121.8

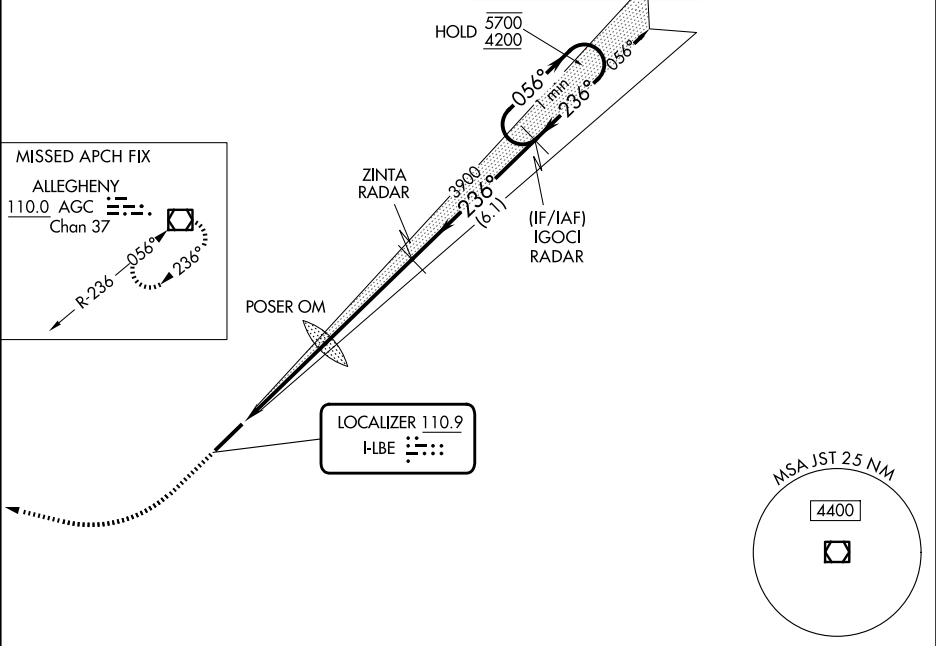

2000
5000
AGC

One Minute
Holding Pattern

ELEV 1199
D TDZE 1145

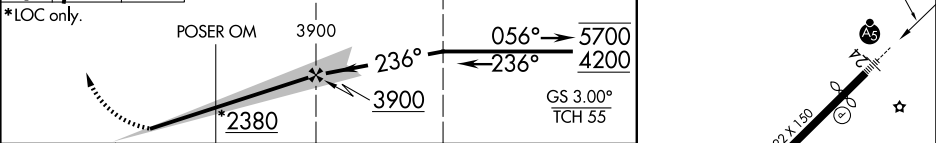

CATEGORY	A	B	C	D
S-ILS 24		1345-1/2	200 (200-1/2)	
S-LOC 24	2380-3/4 1235 (1200-3/4)	2380-1 1235 (1200-1)	2380-3 1235 (1200-3)	
CIRCLING	2380-1 1/4 1181 (1200-1 1/4)	2380-1 1/2 1181 (1200-1 1/2)	2380-3 1181 (1200-3)	
POSER OM MINIMUMS				
S-LOC 24	1760-1/2 615 (600-1/2)	1760-13/8 615 (600-13/8)		
CIRCLING	1760-1 561 (600-1)	1780-1 581 (600-1)	2060-2 1/2 861 (900-2 1/2)	2060-2 3/4 861 (900-2 3/4)

FAF to MAP 8.5 NM

Knots	60	90	120	150	180
Min:Sec	8:30	5:40	4:15	3:24	2:50