

WAAS
CH **63139**
W11A

APP CRS
111°

Rwy Ldg
TDZE **775**
Apt Elev **777**


RNAV (GPS) RWY 11
AUBURN UNIVERSITY RGNL (AUO)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using CSG altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 29 NA at night. When local altimeter setting not received, use CSG altimeter setting: increase LPV DA to 1139 feet; increase LNAV/VNAV DA to 1334 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cats C/D ¼ SM and Circling Cat C/D visibility ½ SM.

MISSED APPROACH:
Climb to 1300 then climbing right turn to 3000 direct HESEL and hold.

AWOS-3PT 132.575	ATLANTA APP CON ★ 125.5 323.1	AUBURN TOWER ★ 123.875 (CTAF) 0	GND CON ★ 121.625	UNICOM 123.0
----------------------------	---	---	-----------------------------	------------------------

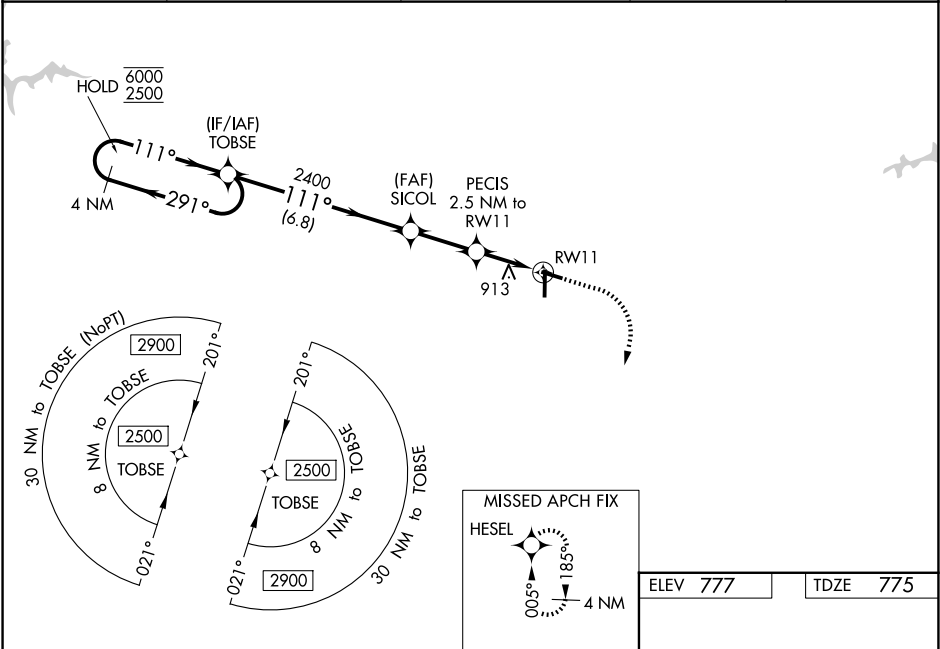

4 NM Holding Pattern		ELEV 777		TDZE 775	
GP 3.00° TCH 45		1300		3000	
TOBSE		SICOL		HESEL	
6000 2500		2400		1600	
291°		2.5 NM to RWY11		1.3 NM to RWY11	
111°		1.3 NM		1.3 NM	
A		B		C	
LPV DA		1025-1		250 (300-1)	
LNAV/VNAV DA		1220-1 3/8		445 (500-1 3/8)	
LNAV MDA		1220-1		445 (500-1)	
CIRCLING		1280-1		1360-1	
		503 (600-1)		583 (600-1)	
		1380-1 3/4		1440-2	
		603 (700-1 3/4)		663 (800-2)	
		HIRL Rwy 18-36 0		MIRL Rwy 11-29 0	