



|                                              |                        |                                                                        |
|----------------------------------------------|------------------------|------------------------------------------------------------------------|
| VORTAC ICT<br><b>113.8</b><br>Chan <b>85</b> | APP CRS<br><b>275°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>N/A</b><br><b>N/A</b><br><b>1409</b> |
|----------------------------------------------|------------------------|------------------------------------------------------------------------|

VOR-B  
BEECH FACTORY (BEC)

|                         |                                                                                                                                                                                           |                                                                                                      |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <b>▼</b><br><b>▲ NA</b> | Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all MDA 40 feet and increase Cat C and D visibility ¼ mile. | MISSED APPROACH: Climbing right turn to 3000 on ICT VORTAC R-095 to SEZER/ICT 23 DME/RADAR and hold. |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|

|                           |                                       |                                              |                         |                         |
|---------------------------|---------------------------------------|----------------------------------------------|-------------------------|-------------------------|
| AWOS-3PT<br><b>119.45</b> | WICHITA APP CON<br><b>134.8 269.1</b> | BEECH TOWER ★<br><b>126.8 (CTAF) 0 313.6</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|---------------------------|---------------------------------------|----------------------------------------------|-------------------------|-------------------------|

RADAR or DME REQUIRED

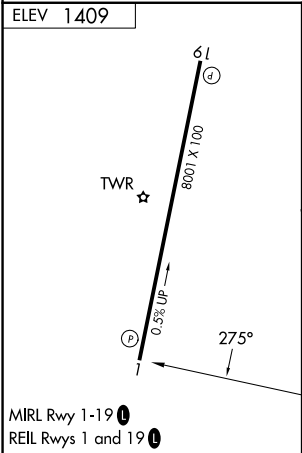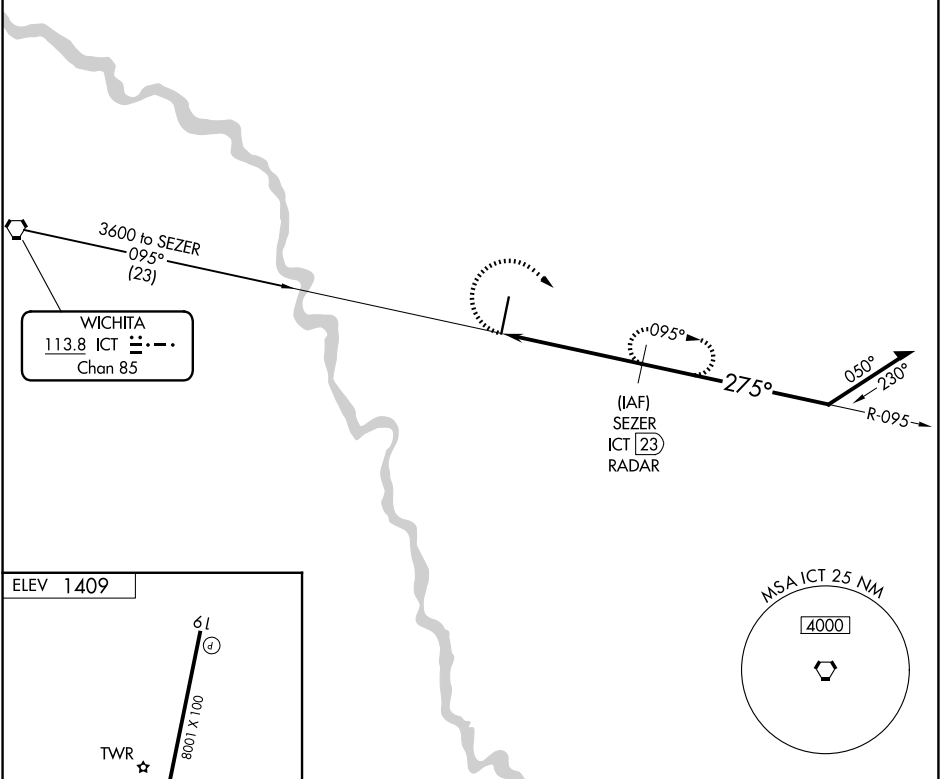

|          |                       |                       |                       |                         |
|----------|-----------------------|-----------------------|-----------------------|-------------------------|
|          |                       |                       |                       |                         |
| CATEGORY | A                     | B                     | C                     | D                       |
| CIRCLING | 1840-1<br>431 (500-1) | 2120-1<br>711 (800-1) | 2120-2<br>711 (800-2) | 2120-2¼<br>711 (800-2¼) |