


LOC/DME I-SWO 109.15 Chan 28 (Y)	APP CRS 175°	Rwy Idg TDZE Apt Elev	7401 1000 1000
--	------------------------	-----------------------------	---

ILS or LOC RWY 17
STILLWATER RGNL (SWO)

ADF required. VDP NA when using Ponca City altimeter setting. When local altimeter setting not received, use Ponca City altimeter setting and increase S-ILS 17 DA to 1280 feet; increase all MDAs 80 feet and S-LOC 17 visibility Cats C/D ½ SM, and increase Circling Cat C visibility ½ SM and Cat D visibility ½ SM. For inop ALS when using Ponca City altimeter setting, increase S-ILS 17 all Cats visibility to ¾ SM.	MALSR A5	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct GABEH LOM and hold, continue climb-in-hold to 3200.
--	-------------	---

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

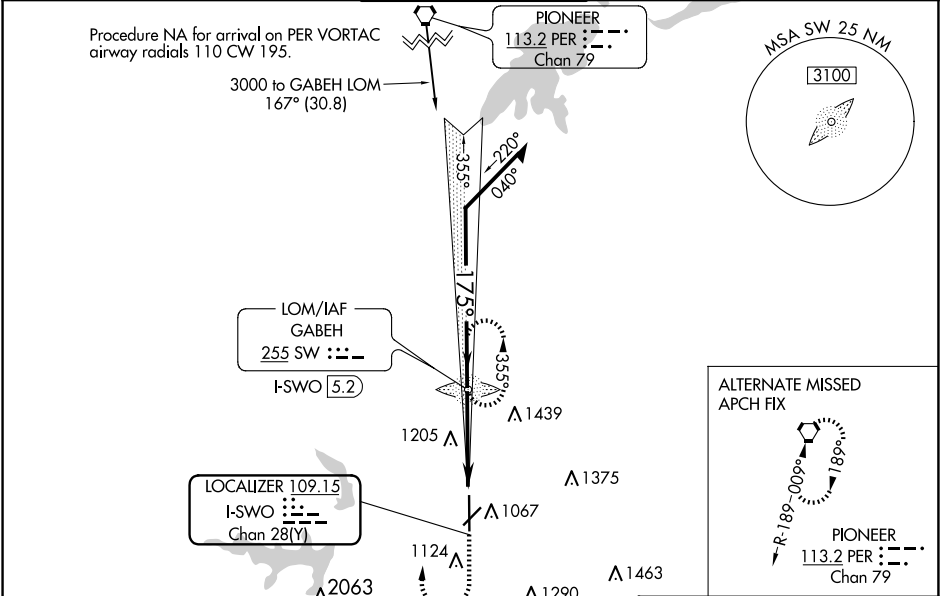

VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 50).					ELEV 1000		TDZE 1000	
Remain within 10 NM					174°			
GABEH LOM I-SWO 5.2					7401 X 100			
GS 3.00° TCH 42					5002 X 75			
2600					0.5% UP			
355°					TWR 1018			
175°					35			
2300								
2.5 NM								
1.3								
CATEGORY	A	B	C	D	REIL Rwy 35			
S-ILS 17	1200-½		200 (200-½)		MIRL Rwy 4-22 and 17-35			
S-LOC 17	1460-½	460 (500-½)	1460-¾	460 (500-¾)	FAF to MAP 3.8 NM			
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-½)	1740-2¼ 740 (800-2¼)	Knots	60	90	120
					Min:Sec	3:48	2:32	1:54
							1:31	1:16

SC-1, 22 JAN 2026 to 19 FEB 2026

SC-1, 22 JAN 2026 to 19 FEB 2026