
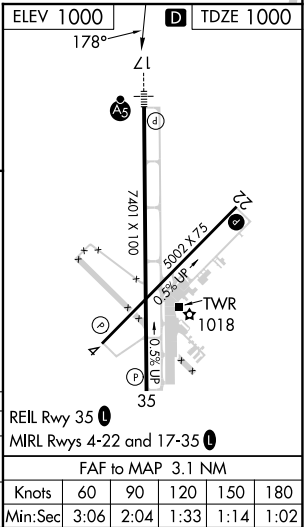
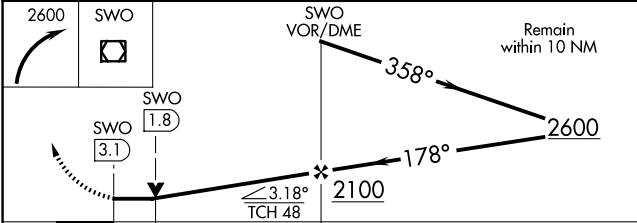


VOR/DME SWO 108.4 Chan 21	APP CRS 178°	Rwy Idg 7401 TDZE 1000 Apt Elev 1000
---	------------------------	---

VOR RWY 17
STILLWATER RGNL (SWO)

⚠ When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet and Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting. For inop MALSR increase S-17 Cats A/B visibility to 1 mile. Helicopter visibility reduction below ¾ SM NA.	MALSR 	MISSED APPROACH: Climbing right turn to 2600 direct SWO VOR/DME and hold.
---	--	--

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

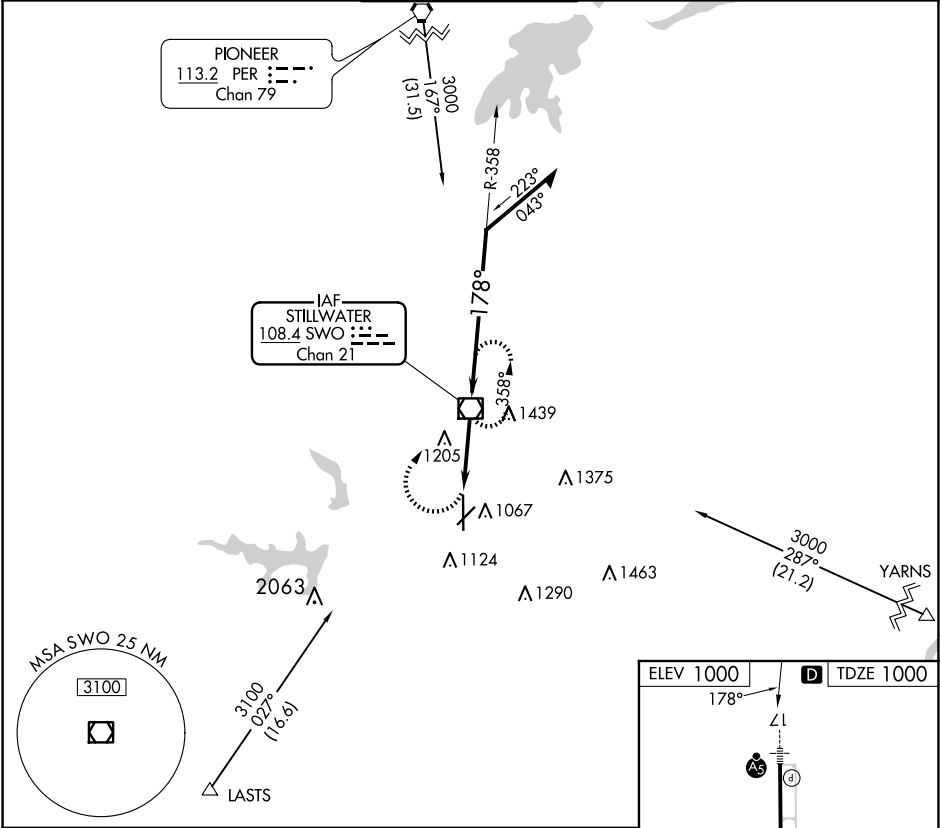

	1.3	1.8 NM				35		
CATEGORY	A		B		C		D	
S-17	1460-¾		460 (500-¾)		1460-1		460 (500-1)	
CIRCLING	1460-1		460 (500-1)		1520-1½		1740-2¼	
					520 (600-1½)		740 (800-2¼)	
REIL Rwy 35		MIRL Rwy 4-22 and 17-35						
FAF to MAP		3.1 NM						
Knots	60	90	120	150	180			
Min:Sec	3:06	2:04	1:33	1:14	1:02			