



WAAS CH 56537 W06A	APP CRS 063°	Rwy Ldg 5799 TDZE 722 Apt Elev 722
--	------------------------	---

RNAV (GPS) RWY 6
COLES COUNTY MEML (MTO)

▼ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign/Urbana altimeter setting and increase all DA 82 feet, increase MDA 100 feet, increase LPV, LNAV/VNAV all Cts, LNAV Cts C/D and Circling C/D visibility $\frac{1}{4}$ mile. Baro-VNAV and VDP NA when using Champaign/Urbana altimeter setting. Rwy 6 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA to Rwy 18 and 36.

MISSED APPROACH:
Climb to 3000 direct
NIBIE and hold.

ASOS 118.475	CHAMPAIGN APP CON ★ 132.85 290.225	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

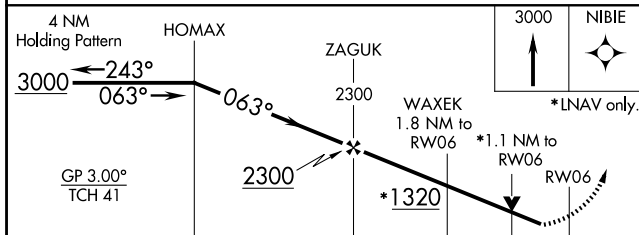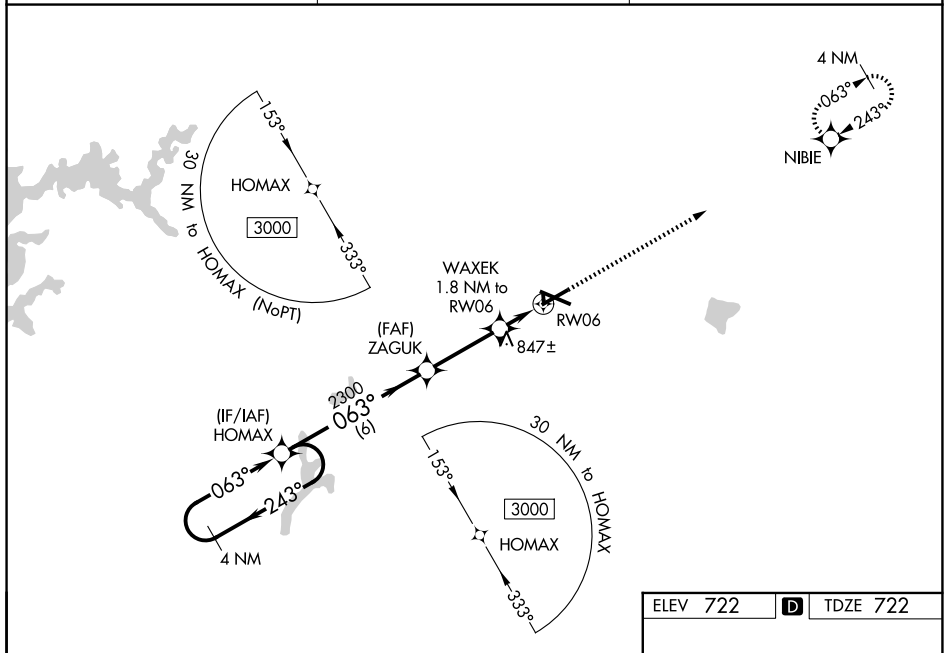

		6 NM	3 NM	0.7 NM	1.1 NM	
CATEGORY	A	B	C	D		
LPV DA	972-7 $\frac{7}{8}$		250 (300-7 $\frac{7}{8}$)			
LNAV/VNAV DA	1124-1 $\frac{1}{8}$		402 (500-1 $\frac{1}{8}$)			
LNAV MDA	1100-1	378 (400-1)	1100-1 $\frac{1}{8}$	378 (400-1 $\frac{1}{8}$)		
CIRCLING	1160-1 438 (500-1)	1180-1 458 (500-1)	1240-1 $\frac{1}{2}$ 518 (600-1 $\frac{1}{2}$)	1380-2 658 (700-2)		

