



LOC I-DVS	APP CRS	Rwy Ldg	8501
111.9	357°	TDZE	790
		Apt Elev	794

ILS or LOC RWY 35

GERALD R FORD INTL (G.R.R.)

DME required. DME or RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 on VIO VOR/DME R-353 to WALKS 13.7 DME and hold.
HONSE fix minimums: for inop ALS, increase Cat C and D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 118.725	GREAT LAKES APP CON★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 0 339.8	GND CON 121.8	UNICOM 122.95
-----------------	-------------------------------------	--	------------------	------------------

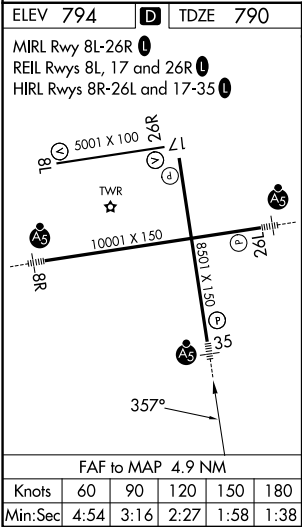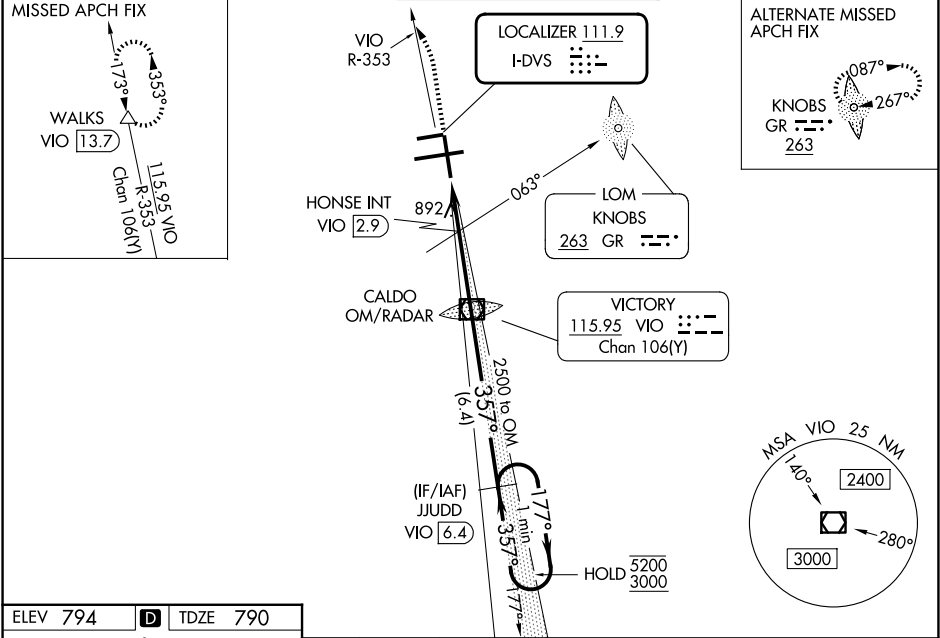

1300	3000	WALKS	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 74).	One Minute Holding Pattern	
VIO R-353			VIO VOR/DME CALDO OM/RADAR	JJUDD VIO 6.4	
*LOC only.	HONSE INT VIO 2.9	2412	177°	357°	5200 3000
VIO 4.9	*VIO 3.8	*1480	357°	2500	GS 3.00° TCH 55
1.1 NM	0.9 NM	2.9 NM	6.4 NM		
CATEGORY	A	B	C	D	
S-ILS 35**	990/24		200 (200-½)		
S-LOC 35	1480/24	690 (700-½)	1480-1½	690 (700-1½)	
CIRCLING	1480-1	686 (700-1)	1480-2 686 (700-2)	1480-2¼ 686 (700-2¼)	
HONSE MINIMUMS (ADF OR DME REQUIRED)					
S-LOC 35	1200/24	410 (500-½)	1200/40	410 (500-¾)	
CIRCLING	1260-1	466 (500-1)	1340-1½ 546 (600-½)	1360-2 566 (600-2)	