

WAAS CH 78104 W27A	APP CRS 264°	Rwy Ldg 6701 TDZE 843 Apt Elev 845
--	------------------------	---


RNAV (GPS) RWY 27R
GRAND FORKS INTL (GFK)

RNP APCH - GPS.


▼ Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1104 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1178 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct DUCEV and hold, continue climb-in-hold to 4000.


ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35	GND CON 124.575	UNICOM 122.95
----------------------	---	---	---------------------------	-------------------------



Procedure NA for arrival on GFK VOR/DME
airway radials 360 CW 160.

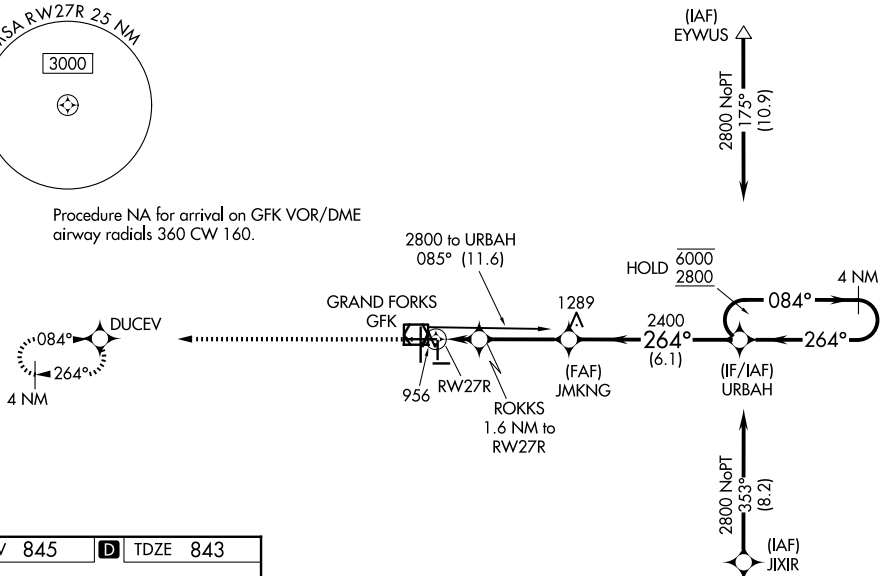

ELEV 845	D	TDZE 843
----------	----------	----------



MIRL Rwy 9L-27R, 9R-27L and 17L-35R (L)
HIRL Rwy 17R-35L (L)
REIL Rwy 17R, 9L, and 27R (L)

