


WAAS CH 58104 W09A	APP CRS 084°	Rwy Ldg TDZE 845 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 9L

GRAND FORKS INTL (GFK)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2800 direct URBH and hold.	
▼ Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1106 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1156 feet and all visibilities ⅛ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.				
ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4(CTAF) 0 350.35	GND CON 124.575	UNICOM 122.95

Procedure NA for arrivals at GFK VOR/DME on V55 northeast bound.

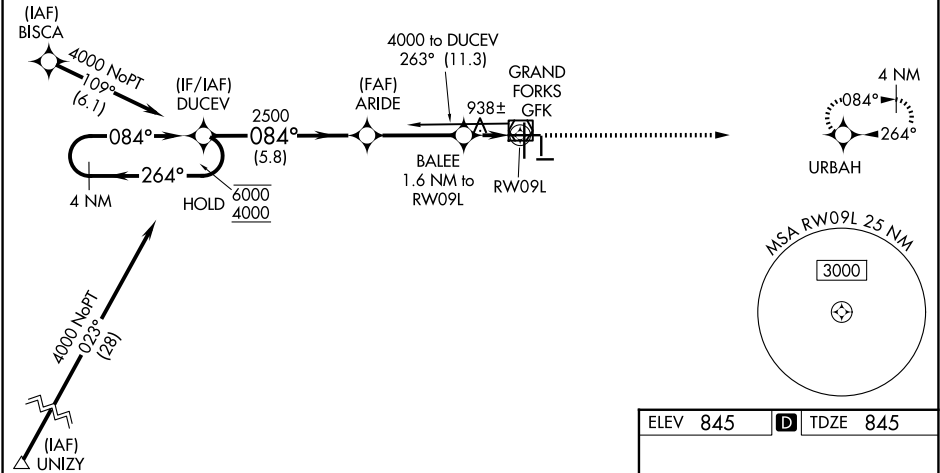

4 NM Holding Pattern		DUCEV	ARIDE	BALEE 1.6 NM to RW09L	2800 URBH
6000 ← 264°		4000 → 084°	2500	1400	
GP 3.00° TCH 45			5.8 NM	3.5 NM	0.6 1 NM
CATEGORY	A	B	C	D	
LPV DA		1045- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)		
LNAV/VNAV DA		1095- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)		
LNAV MDA		1200-1	355 (400-1)		
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 $\frac{1}{2}$ 555 (600-1 $\frac{1}{2}$)	1420-2 575 (600-2)	

