

WAAS CH 72711 W13A	APP CRS 133°	Rwy Ldg TDZE Apt Elev	6504 1115 1119
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

THIEF RIVER FALLS RGNL (TVF)

▼


Baro-VNAV and VDP NA when using Crookston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

⚠

When local altimeter setting not received, use Crookston altimeter setting: increase LPV DA to 1447 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1518 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ¾ SM.

MISSED APPROACH:
Climb to 2700 direct
ZUDOL and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

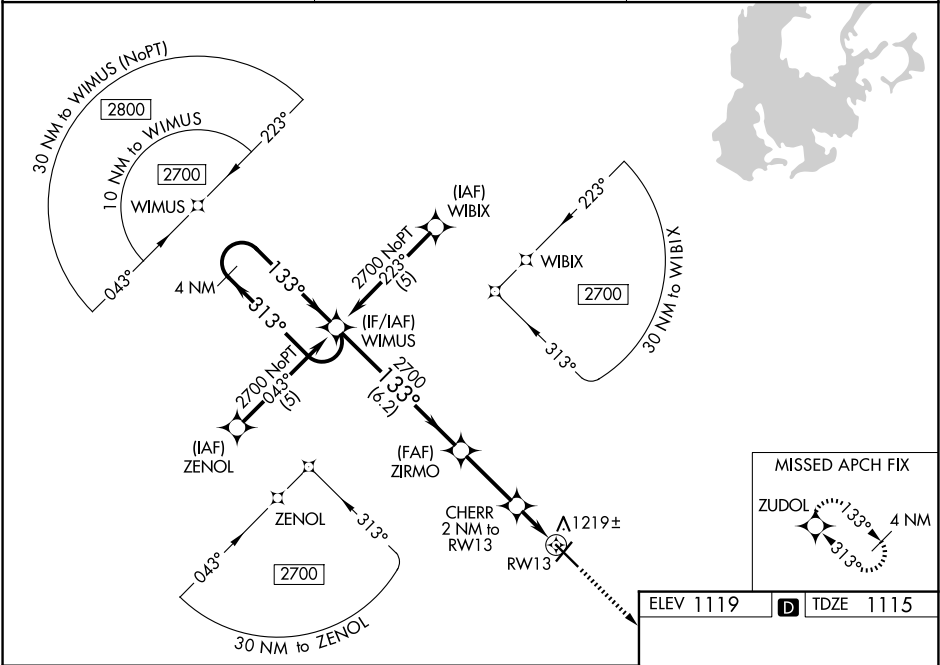

4 NM Holding Pattern		WIMUS	ZIRMO	CHERR 2 NM to RW13	2700	ZUDOL
2700 ← 313°		133° →	2700	*1 NM to RW13	RW13	
GP 3.00°		TCH 40	*1780			
6.2 NM		2.8 NM	1 NM	1 NM		
CATEGORY	A	B	C	D		
LPV DA	1365-1		250 (300-1)			
LNAV/VNAV DA	1436-1¼		321 (400-1¼)			
LNAV MDA	1480-1		365 (400-1)		1480-1¼	
					365 (400-1¼)	
CIRCLING	1540-1	1580-1	1820-2	1980-2¾		
	421 (500-1)	461 (500-1)	701 (800-2)	861 (900-2¾)		
THIEF RIVER FALLS, MINNESOTA						HIRL Rwy 13-31 1
Orig-B 23APR20						MRL Rwy 4-22 1
						REIL Rws 4, 13 and 22 1