



WAAS CH 77836 W22A	APP CRS 217°	Rwy Ldg TDZE 1119 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 22
THIEF RIVER FALLS RGNL (TVF)

⚠ Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats visibility to 1½ mile and LNAV/VNAV all Cats visibility to 1¼ mile.

MISSED APPROACH:
Climb 3300 direct
BOOMS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

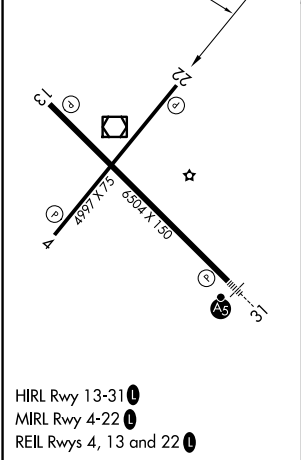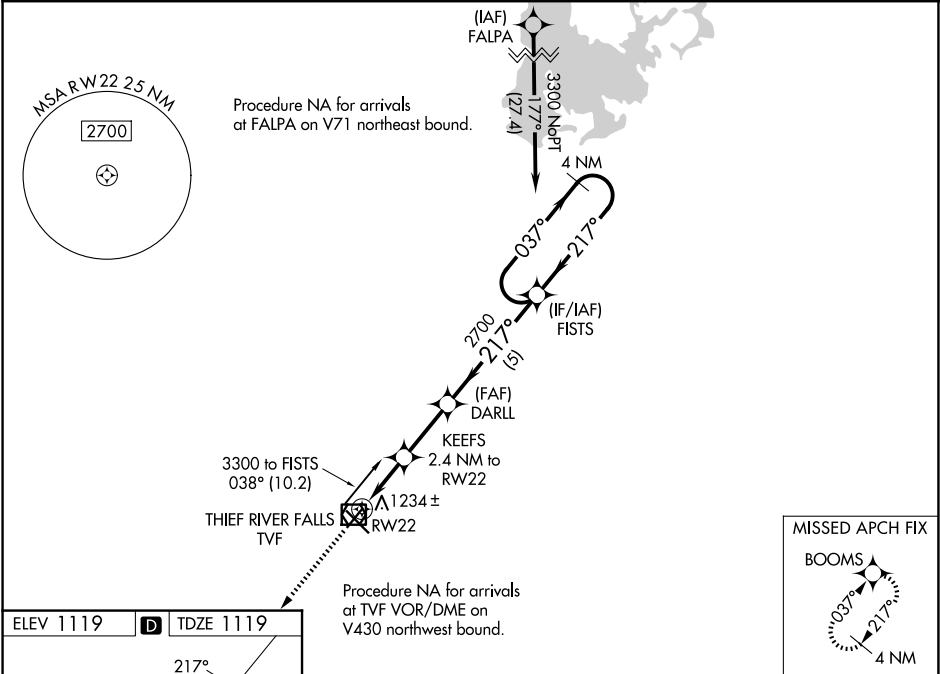

ELEV 1119 D TDZE 1119		3300 BOOMS		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).		FISTS		4 NM Holding Pattern	
*LNAV only		KEEFS 2.4 NM to RW22		DARLL 2700		217°		037°	
1.1 NM to RW22		RW22		1920		2700		GP 3.00° TCH 40	
1.1 NM		1.3 NM		2.4 NM		5 NM			
CATEGORY	A	B		C		D			
LPV DA	1369-1	250 (300-1)		NA					
LNAV/VNAV DA	1396-1	277 (300-1)		NA					
LNAV MDA	1500-1	381 (400-1)		NA					
CIRCLING	1540-1	1580-1		NA					
	421 (500-1)	461 (500-1)							

NC-1, 22 JAN 2026 to 19 FEB 2026

NC-1, 22 JAN 2026 to 19 FEB 2026