


WAAS CH 69311 W31A	APP CRS 313°	Rwy Ldg TDZE 1114 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 31

THIEF RIVER FALLS RGNL (TVF)

RNP APCH - GPS.		
Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting: increase LPV DA to 1447 feet; increase LNAV/VNAV DA to 1569 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM.	MALSR	MISSED APPROACH: Climb to 2700 direct WIMUS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

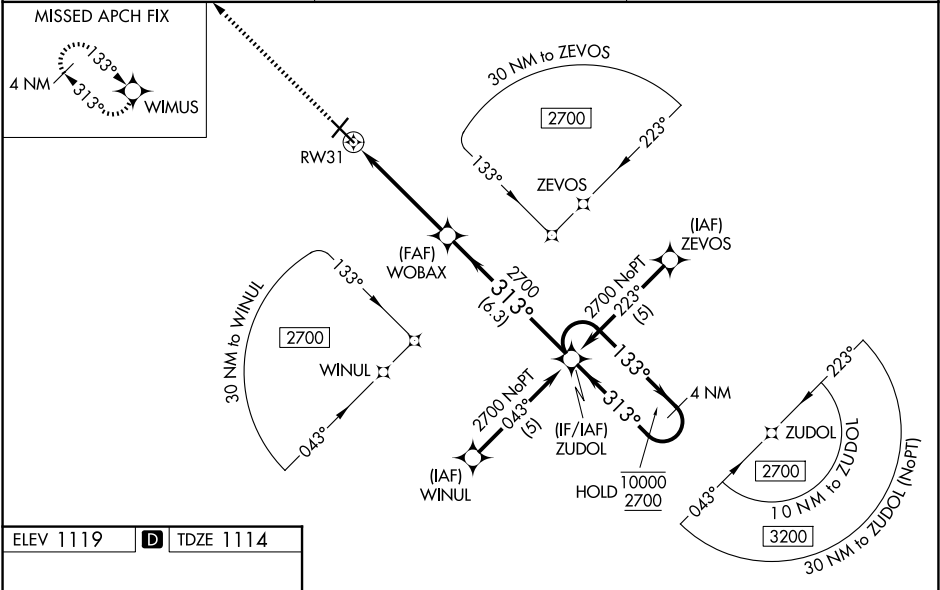

ELEV 1119	D	TDZE 1114
-----------	----------	-----------

