

WAAS CH 57904 W20A	APP CRS 202°	Rwy Ldg 8012 TDZE 468 Apt Elev 472
--	------------------------	---

RNAV (GPS) RWY 20

VETERANS AIRPORT OF SOUTHERN ILLINOIS (MWA)

RNP APCH.


T Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 ½ SM.

MALSR



MISSED APPROACH:
Climb to 2400 direct
ANUKE and hold.

AWOS-3P 119.675	KANSAS CITY CENTER 127.475 346.275	MARION TOWER★ 128.4 (CTAF) 0	GND CON 121.7	UNICOM 122.95
---------------------------	--	--	-------------------------	-------------------------

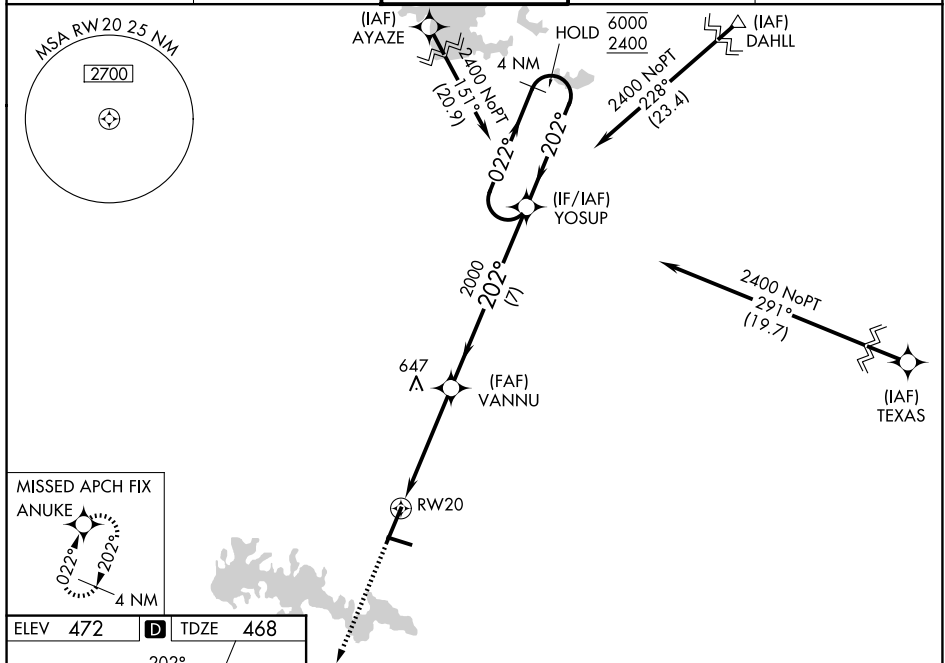

ELEV 472 D TDZE 468

202°

8012 X 150

0.3% UP

4997 X 100

2 TWR

REIL Rwy 2

REIL Rwys 11 and 29

HIRL Rwy 2-20

MIRL Rwy 11-29

*LNAV only.

RW20

YOSUP

4 NM Holding Pattern

VANNU

2000

2000

20°

022° → 6000
← 202° 2400

GP 3.00°
TCH 50

1.2 3.5 NM 7 NM

CATEGORY	A	B	C	D
LPV DA	668-½ 200 (200-½)			
LNAV/VNAV DA	773-½ 305 (400-½)			
LNAV MDA	880-½ 412 (500-½)		880-¾ 412 (500-¾)	
CIRCLING	920-1 448 (500-1)	940-1 468 (500-1)	1040-1½ 568 (600-1½)	1340-2¾ 868 (900-2¾)