

LOC I-JBR	APP CRS	Rwy Ldg	6200
110.15	230°	TDZE	262
		Apt Elev	262

ILS or LOC RWY 23

JONESBORO MUNI (JBR)

⚠

⚠


Circling NA northwest of Rwy 5-23. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter not received, use Walnut Ridge altimeter setting; increase DA to 600 feet and all visibilities ½ SM; increase all MDAs 60 feet, S-LOC 23 Cat C/D visibility ½ SM and Circling Cat C ¼ SM. For inop ALS, increase S-ILS 23 Cat A/B visibility to ¾ SM and S-LOC 23 Cat C/D to 1 ¾ SM. For inop ALS when using Walnut Ridge altimeter setting, increase S-ILS 23 Cat A/B visibility to 1 SM. When using Walnut Ridge altimeter setting, inop table does not apply to S-LOC 23 Cats C/D. Circling Rwy 31 NA at night.

ODALS

MISSED APPROACH:

Climb to 2000 then climbing left turn to 2300 direct JBR VOR/DME and hold.

ASOS	MEMPHIS CENTER	UNICOM
118.525	120.075 289.4	123.0 (CTAF) 0

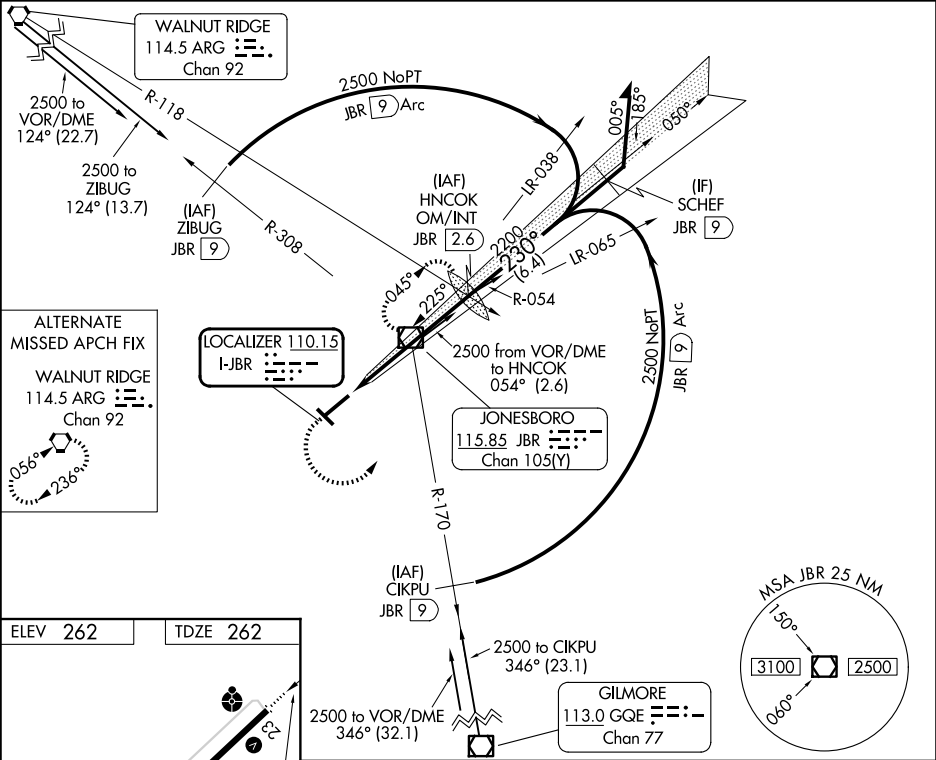

ELEV 262	TDZE 262
----------	----------

MRL Rwys 5-23 and 13-31

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

	2000	2300	JBR	HNCOK OM/INT JBR 2.6	Remain within 10 NM
			JBR VOR/DME	2143	050°
			JBR 3.1	2200	230°
				2200	GS 3.00° TCH 53
CATEGORY	A	B	C	D	
S-ILS 23		546-¾ 284 (300-¾)			
S-LOC 23	720-¾ 458 (500-¾)		720-1¼ 458 (500-1¼)		
CIRCLING	740-1 478 (500-1)		820-1½ 558 (600-1½)	1080-2¾ 818 (900-2¾)	