


WAAS CH 78417 W21A	APP CRS 218°	Rwy Ldg TDZE 1449 Apt Elev 1469
--	------------------------	---


RNAV (GPS) RWY 21

DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.	⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using 9D7 altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use 9D7 altimeter setting and increase LPV DA to 1760 feet; increase LNAV/VNAV DA to 1901 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.	MISSED APPROACH: Climb to 3400 direct ZIKID and hold.
-----------------	---	--

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

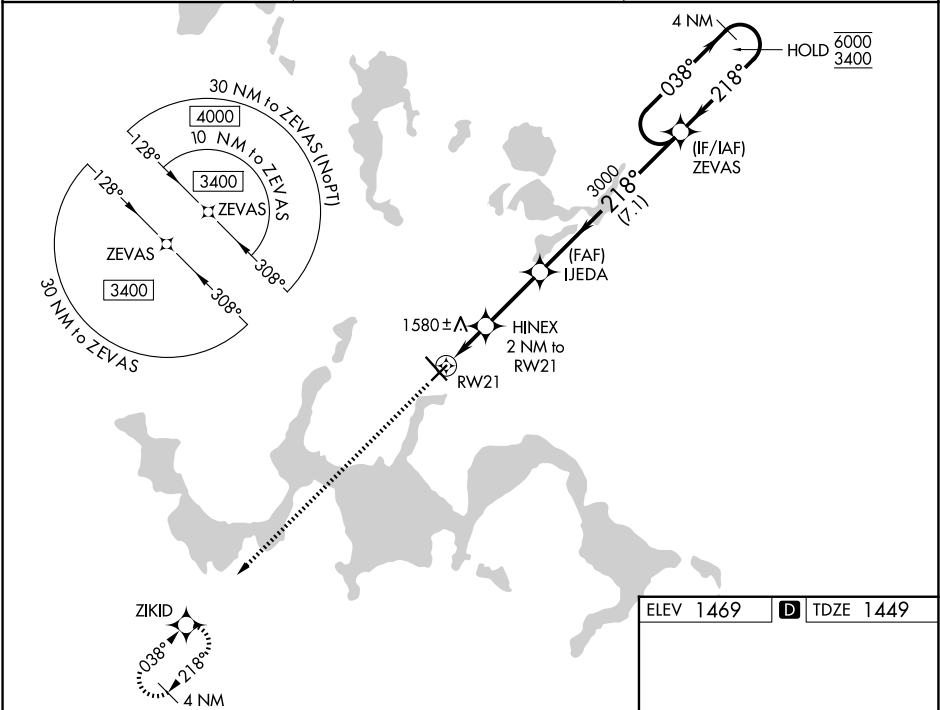

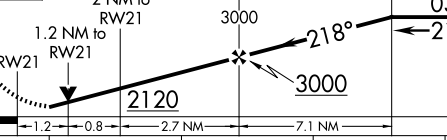3400	ZIKID	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).			ZEVAS	4 NM Holding Pattern	
							
		HINEX 2 NM to RW21		IJEDA 3000	038° → 6000 ← 218° 3400		
		1.2 NM to RW21			GP 3.00° TCH 50		
		2120		218°			
		2120		3000			
		1.2		0.8			
		A		B			
		2.7 NM		7.1 NM			
CATEGORY		A		B			
LPV DA		1699-1		250 (300-1)			
LNAV/ VNAV DA		1840-1½		391 (400-1½)			
LNAV MDA		1840-1 391 (400-1)		1840-1½ 391 (400-1½)			
CIRCLING		2000-1 531 (600-1)		2240-2¼ 771 (800-2¼) 2240-2½ 771 (800-2½)			

