


APP CRS	Rwy Ldg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS				MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.		
When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.						
ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
121.45	123.7 371.875	119.925 (CTAF) 0 379.3	121.8	118.275	121.8 (When twr closed)	122.95

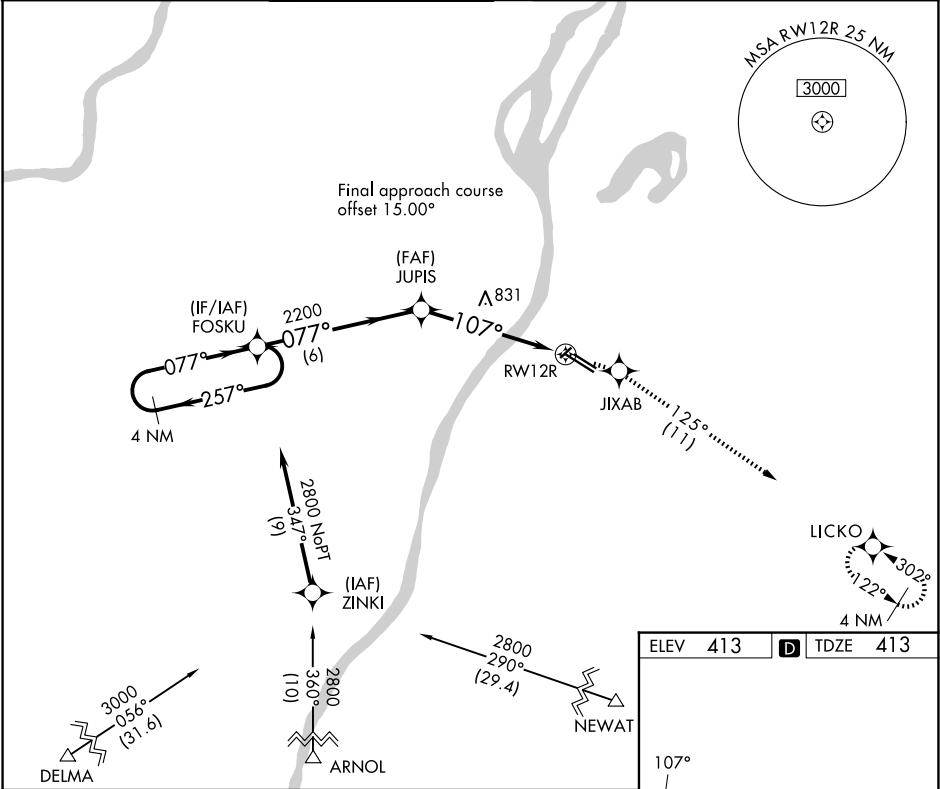

4 NM Holding Pattern		2200 JIXAB LICKO	
2800 ← 257° 077° →		2.1 NM to RW12R	
VDP NA when using St Louis Lambert Intl altimeter setting.		RW12R	
6 NM		3.3 NM	
CATEGORY	A	B	D
LNAV MDA	1140-1 727 (800-1)	1140-2 727 (800-2)	1140-2¼ 727 (800-2¼)
CIRCLING	1140-1 727 (800-1)	1240-2½ 827 (900-2½)	1380-3 967 (1000-3)

ELEV 413 TDZE 413

107°

279 175 15 5301 X 75 7002 X 150 300 300 300

TWR

HIRL Rwy 12R-30L
REIL Rwys 12L and 12R
REIL Rwy 30R
MIRL Rwys 5-23 and 12L-30R