

LOC I-HEF <u>109.1</u>	APP CRS 161°	Rwy Ldg 6200 TDZE 192 Apt Elev 192
----------------------------------	------------------------	---

ILS or LOC RWY 16L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)



When local altimeter setting not received, use Dulles altimeter setting and increase DA 49 feet, all MDA 60 feet, and increase Cat C/D Circling visibility ¼ mile.






MISSED APPROACH: Climb to 700, then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS
125.175

POTOMAC APP CON
128.525 306.925

MANASSAS TOWER ★
133.1 (CTAF) **L** 360.75

GND CON
121.8

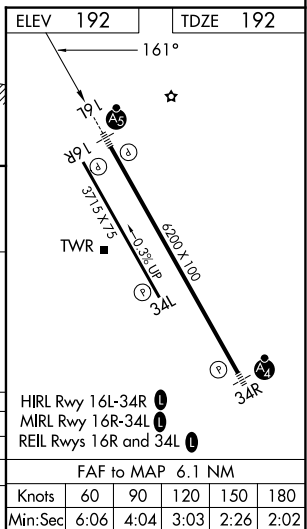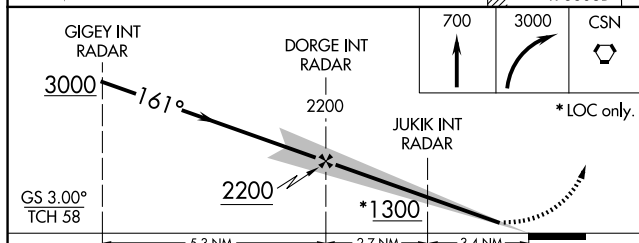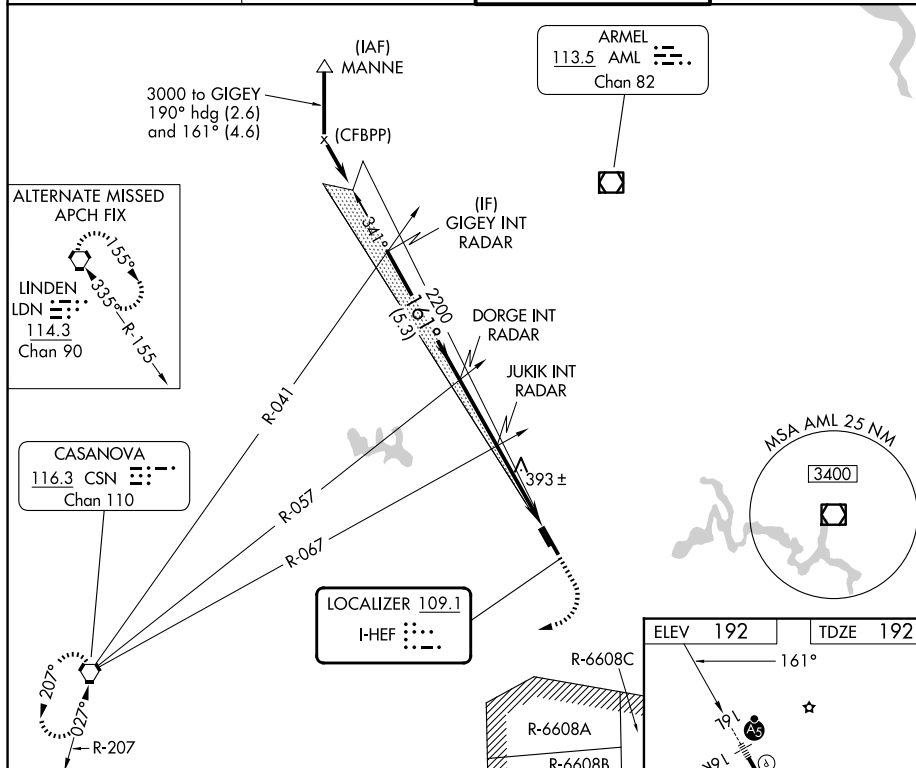

CATEGORY	A	B	C	D
S-ILS 16L	392-1/2 200 (200-1/2)			
S-LOC 16L	660-1/2 468 (500-1/2)	660-1 468 (500-1)		
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1 3/4 648 (700-1 3/4)	880-2 1/4 688 (700-2 1/4)
	FAF to MAP 6.1 NM			
	Knots	60	90	120 150 180
	Min:Sec	6:06	4:04	3:03 2:26 2:02