

DORRL TWO DEPARTURE (RNAV)


MIAMI EXEC (TMB)
MIAMI, FLORIDA

MIAMI DEP CON
125.5 354.1
ATIS
124.0
CLNC DEL
133.0
GND CON
121.7
MIAMI EXEC TOWER ★
118.9 (CTAF)

TOP ALTITUDE:
ASSIGNED BY ATC


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

NOTE: For turbo-props/props filed at or above 13000.

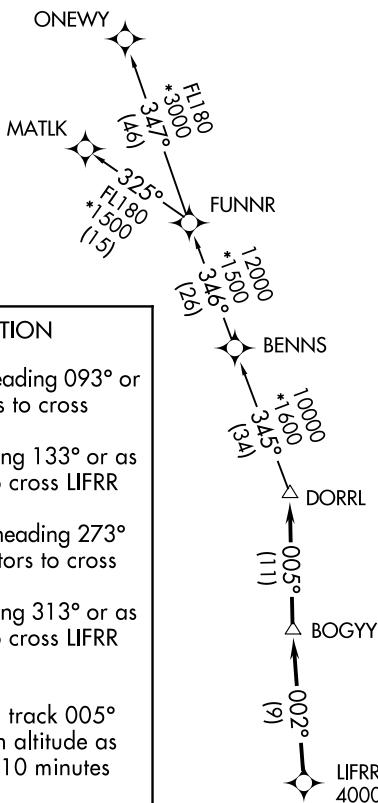

TAKEOFF MINIMUMS

Rwy 9L: Standard with minimum climb of 500'/NM to 1300.
Rwy 9R: Standard with minimum climb of 500'/NM to 1500.
Rwy 13: Standard with minimum climb of 500'/NM to 1800.
Rwy 27L: Standard with minimum climb of 500'/NM to 1900.
Rwy 27R: Standard with minimum climb of 500'/NM to 1700.
Rwy 31: Standard with minimum climb of 500'/NM to 1400.



NOTE: Chart not to scale.

DORRL TWO DEPARTURE (RNAV)

(DORRL2.DORRL) 21MAR24

MIAMI, FLORIDA

MIAMI EXEC (TMB)