

WAAS CH 93824 W04A	APP CRS 043°	Rwy Ldg TDZE Apt Elev	6000 253 257
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
DOUGLAS MUNI (DQH)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or
A above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and
LNAV Cats C and D visibility to 1 SM.

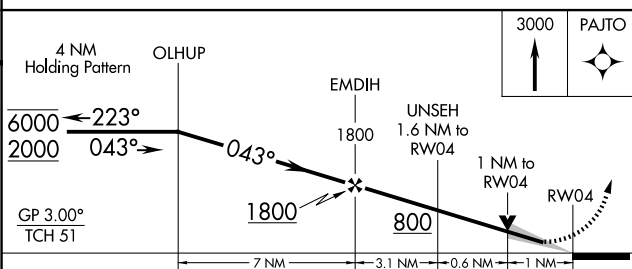

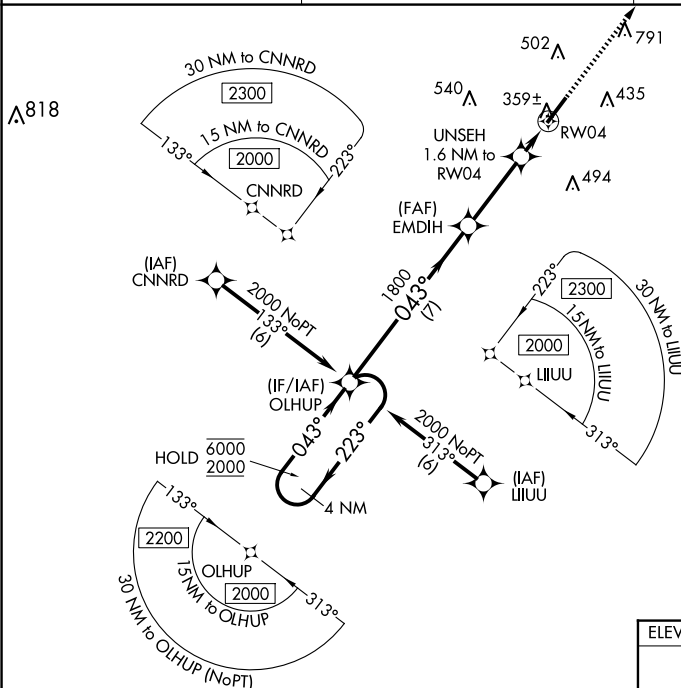
MALSR



MISSED APPROACH: Climb to 3000 direct PAJTO and hold, continue climb-in-hold to 3000.

AWOS-3
119.075

JACKSONVILLE CENTER
127.575 269.025

UNICOM
122.8 (CTAF) **L**

CATEGORY		A	B	C	D
LPV	DA	453-½		200 (200-½)	
LNAV/ VNAV	DA	540-½		287 (300-½)	
LNAV	MDA	620-½	367 (400-½)	620-⅝	367 (400-¾)
 CIRCLING		720-1 463 (500-1)	820-1 563 (600-1)	960-2 703 (800-2)	960-2¼ 703 (800-2¼)

