

WAAS CH 86627 W30A	APP CRS 302°	Rwy Ldg 5500 TDZE 1145 Apt Elev 1145
--	------------------------	---


RNAV (GPS) RWY 30
OWATONNA DEGNER RGNL (OWA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME/RNP-0.3 NA. When local altimeter setting not received, use Fairbault altimeter setting and increase all DA 41 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cats C/D visibility to 1 mile, Cat C Circling visibility to 1¾ mile and Cat D visibility to 2½ mile. VDP and Baro-VNAV NA when using Fairbault altimeter setting. For inop MALSR increase LNAV/VNAV all Cats visibility to 1¾ miles. For inop MALSR, when using Fairbault altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 1¾ mile.

MALSR


MISSED APPROACH:
Climb to 2800 direct NOVSJ and hold.

AWOS-3 128.325	ROCHESTER APP CON ★ 119.8 251.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

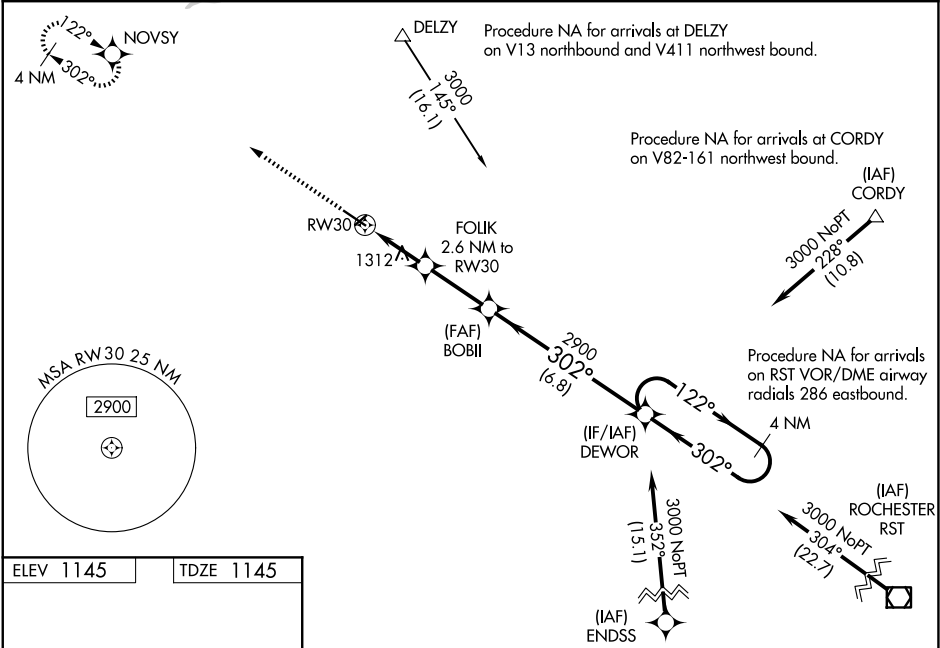

2800 **NOVSJ**

***LNAV only**

***1.2 NM to RW30**

2020*

2900

2900

3000

GP 3.00° TCH 50

CATEGORY	A	B	C	D
LPV DA	1345-½	200 (200-½)		
LNAV/VNAV DA	1567-1	422 (500-1)		
LNAV MDA	1580-½	435 (500-½)	1580-¾	435 (500-¾)
CIRCLING	1640-1	1700-1	1720-1½	1880-2¼
	495 (500-1)	555 (600-1)	575 (600-1½)	735 (800-2¼)

NC-1, 22 JAN 2026 to 19 FEB 2026

NC-1, 22 JAN 2026 to 19 FEB 2026