

WAAS CH 70703 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	5001 738 738
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

T Baro-VNAV NA when using Grissom ARB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA.

A ^{NA} VDP NA with Grissom ARB altimeter setting. When local altimeter setting not received, use Grissom ARB altimeter setting: increase LPV DA to 974 feet; increase LNAV/VNAV DA to 1056 feet and all visibilities ¼ SM; increase all MDA 40 feet and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2500 direct
DATEC and hold.

AWOS-3P 118.5	GRISCOM APP CON★ 121.05 338.275	UNICOM 122.8 (CTAF) 0
-------------------------	---	---------------------------------

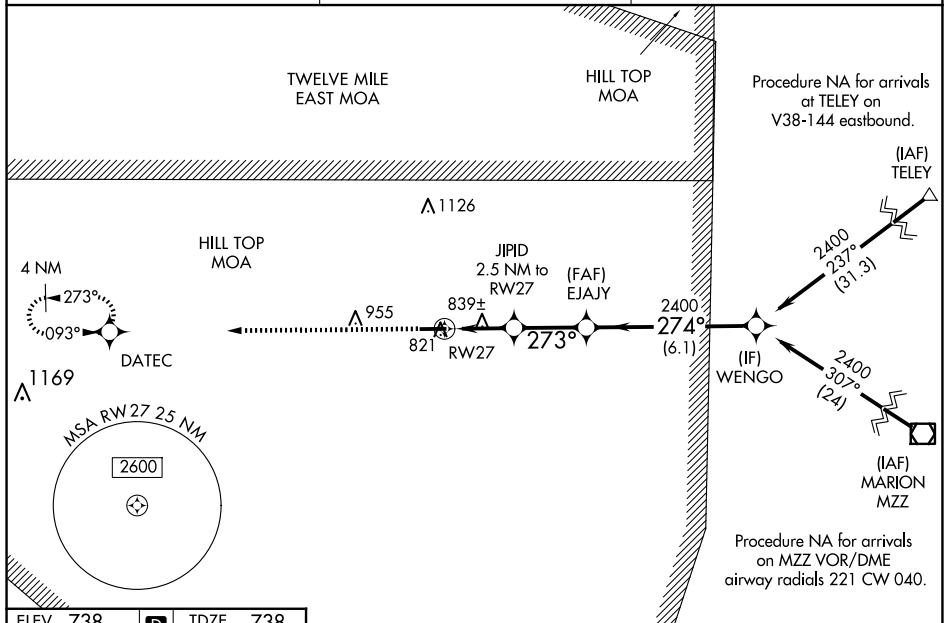

ELEV 738	D	TDZE 738
----------	----------	----------

2500 DATEC

* LNAV only

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 25).

EAJY 2400

WENGO

JIPID 2.5 NM to RW27

* 1.1 NM to RW27

RW27

273°

* 1560

274°

2400

GP 3.00° TCH 40

1.1 NM 1.4 NM 2.6 NM 6.1 NM

MIRL Rwy 9-27 **L**
REIL Rwy 9 and 27 **L**

LOGANSPORT, INDIANA

Amdt 1B 15JUL21

40°43'N-86°22'W

LOGANSPORT/CASS COUNTY (GGP)

RNAV (GPS) RWY 27