

APP CRS	Rwy Ldg	10000
087°	TDZE	91
	Apt Elev	96

RNAV (RNP) Y RWY 9

GEORGE BUSH INTCNL/HOUSTON (IAH)


▼

For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1½ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEBX and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 135.15 290.2	GND CON 118.575
------------------	--	-------------------------------	--------------------

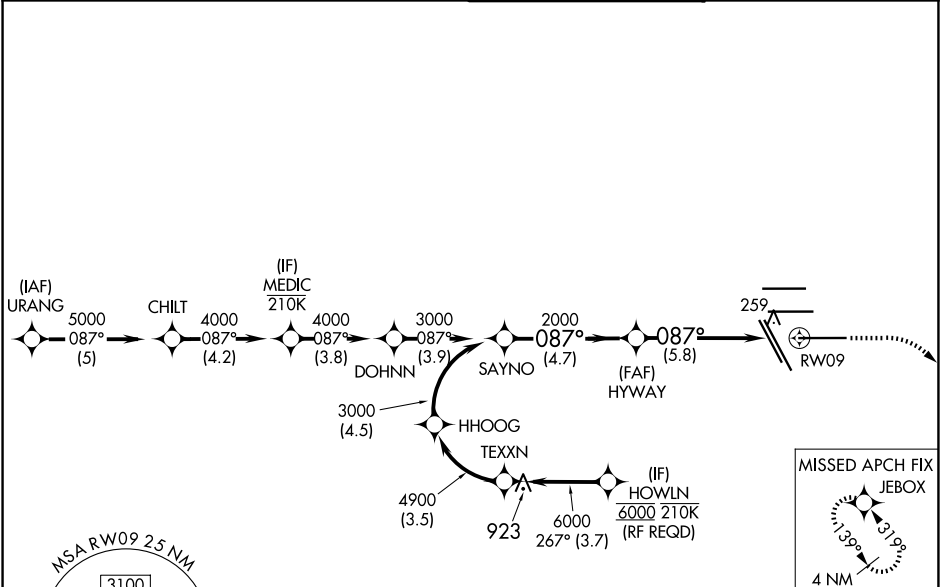

ELEV 96

TDZE 91

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

SAYNO

HYWAY

RWY 9

3000

2000

2000

580

3000

JEBX

GP 3.00°

TCH 50

4.7 NM

5.8 NM

CATEGORY

A

B

C

D

RNP 0.30 DA

516/49 425 (500-1)

AUTHORIZATION REQUIRED

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L

HIRL all Rwy