

WAAS CH 97726 W26A	APP CRS 267°	Rwy Ldg TDZE Apt Elev	9000 96 96
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) Z RWY 26R
GEORGE BUSH INTCNTL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1¼, and LNAV Cat C/D/E visibility to 1½. DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 26L and Rwy 27. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 120.725 290.2	GND CON 118.575
-------------------------	--	---------------------------------------	---------------------------

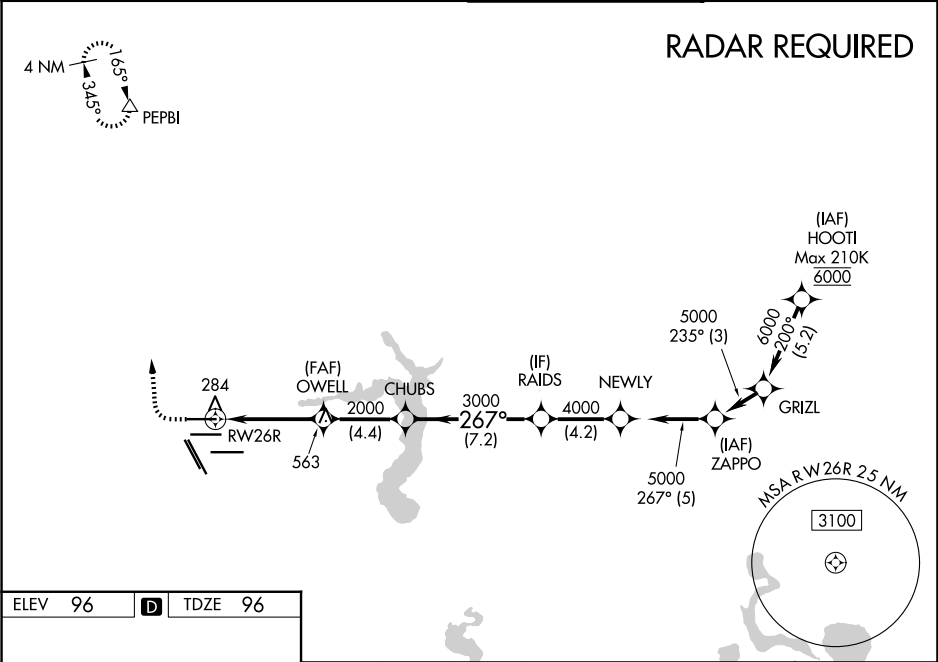

ELEV 96 **D** TDZE 96

TDZ/CL Rws 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rws

	600	3000	PEPBI						
*LNAV only									
	RW26R	OWELL	CHUBS	RAIDS	NEWLY	ZAPPO			
	2000	2000	3000	4000	5000	5000			
	1.4	4.4 NM	4.4 NM	7.2 NM	4.2 NM	5 NM			
CATEGORY	A	B	C	D	E				
LPV DA		296/18	200 (200-½)						
LNAV/VNAV DA		496/42	400 (400-¾)						
LNAV MDA	600/24	504 (600-½)		600/55	504 (600-1)				

SC-5, 22 JAN 2026 to 19 FEB 2026

SC-5, 22 JAN 2026 to 19 FEB 2026