

WAAS CH 53418 W20A	APP CRS 197°	Rwy Ldg TDZE 373 Apt Elev 373
--	------------------------	---

RNAV (GPS) RWY 20

PERRYVILLE RGNL (PCD)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using CGI altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use CGI altimeter setting and increase LPV DA to 723 feet; increase LNAV/VNAV DA to 746 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct ACDIV and hold.

AWOS-3PT 118.95	KANSAS CITY CENTER 127.475 346.275	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

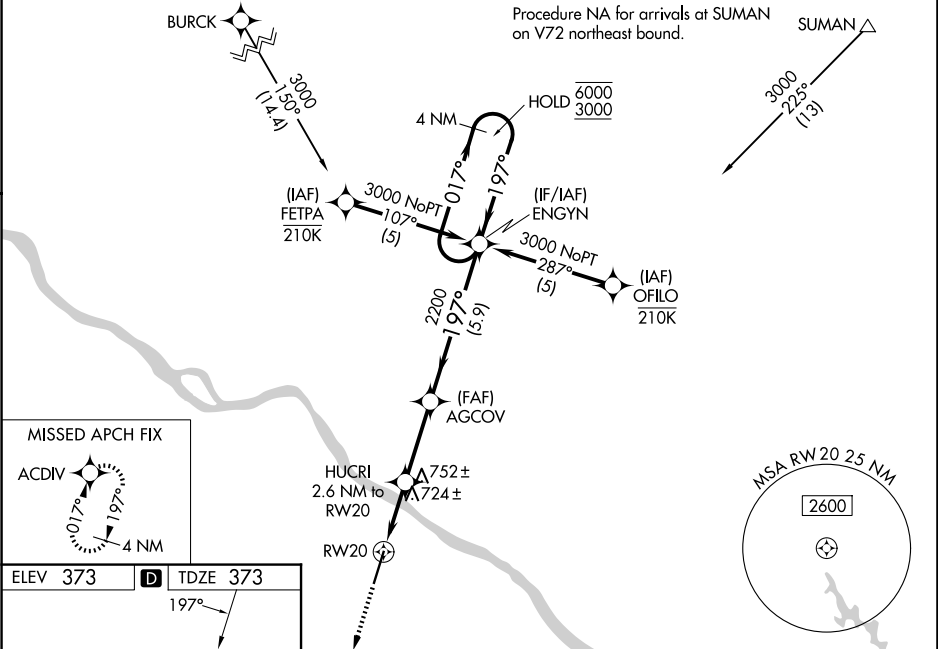

ELEV 373 **D** TDZE 373

197°

02

6483 X 100

2

MIRL Rwy 2-20

REIL Rws 2 and 20

3000	ACDIV	HUCRI 2.6 NM to RW20	AGCOV 2200	ENGYN 2200	4 NM Holding Pattern
1.8	0.8	3	5.9		
GP 3.00° TCH 40					
CATEGORY	A	B	C	D	
LPV DA	623-1 250 (300-1)				
LNAV/VNAV DA	646-1 273 (300-1)				
LNAV MDA	980-1	607 (700-1)	980-1¾	607 (700-1¾)	
CIRCLING	980-1 607 (700-1)	1000-1 627 (700-1)	1260-2¾ 887 (900-2¾)	1260-3 887 (900-3)	