

WAAS
CH **69601**
W13A

APP CRS
132°

Rwy Ldg
TDZE **962**
Apt Elev **962**

RNAV (GPS) RWY 13

LIVINGSTON COUNTY/SPENCER J HARDY (OZW)

RNP APCH.

MALSR


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 37°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.

MISSED APPROACH:
Climb to 2800 direct BROVI and hold.

AWOS-3P 118.875	DETROIT APP CON 132.35 284.0	CLNC DEL 121.725 (GCO)	UNICOM 123.0 (CTAF) 0
---------------------------	--	----------------------------------	---------------------------------

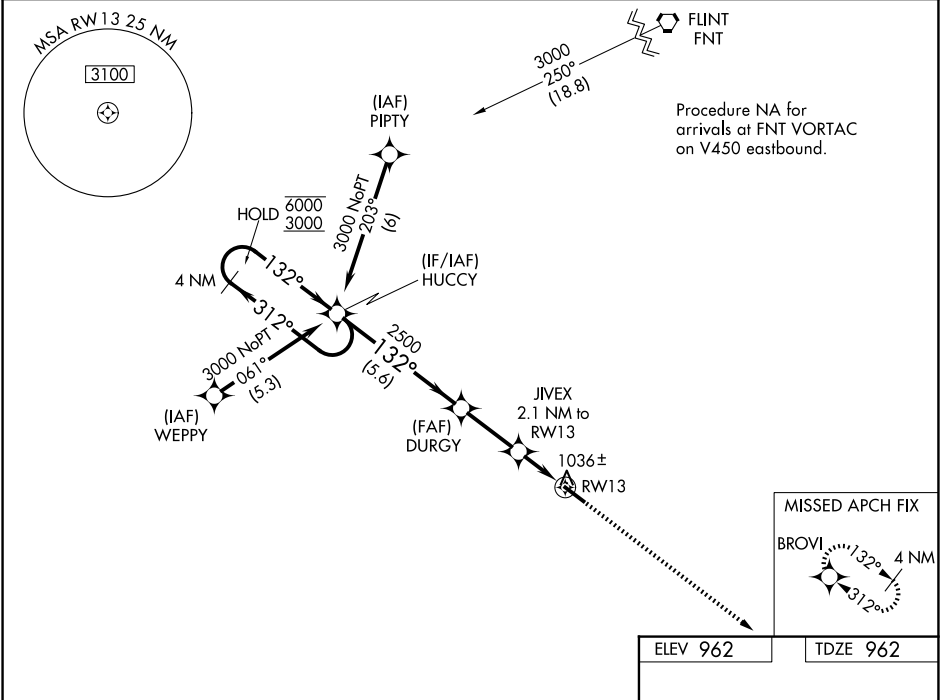

4 NM Holding Pattern HUCCY

GP 3.00° TCH 48

6000 3000

312° 132°

2500

5.6 NM 2.6 NM 1.2 0.9

2800 BROVI

JIVEX 2.1 NM to RW13

*0.9 NM to RW13

*1660

*LNAV only

5002 X 100

0.4° UP

CATEGORY	A	B	C	D
LPV DA		1162-½	200 (200-½)	
LNAV/VNAV DA		1212-½	250 (300-½)	
LNAV MDA		1300-½	338 (400-½)	
CIRCLING	1400-1 438 (500-1)	1420-1 458 (500-1)	1600-1¾ 638 (700-1¾)	1600-2 638 (700-2)

ELEV 962

TDZE 962

HIRL Rwy 13-31 0

MIRL Rwy 13-31

REIL Rwy 31 0