

WAAS CH 99436 W35A	APP CRS 354°	Rwy Ldg TDZE 1155 Apt Elev 1160
--	------------------------	---

RNAV (GPS) RWY 35

STROTHER FLD (WLD)

RNP APCH.


▼

▲

Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower NH altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower NH altimeter setting: increase LPV DA to 1509 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1557 feet and all visibilities ¼ SM; increase all MDA 120 feet, LNAV Cat C visibility ⅓ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3600 direct ECUWO and hold.

ASOS 118.025	KANSAS CITY CENTER 127.8 319.1	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

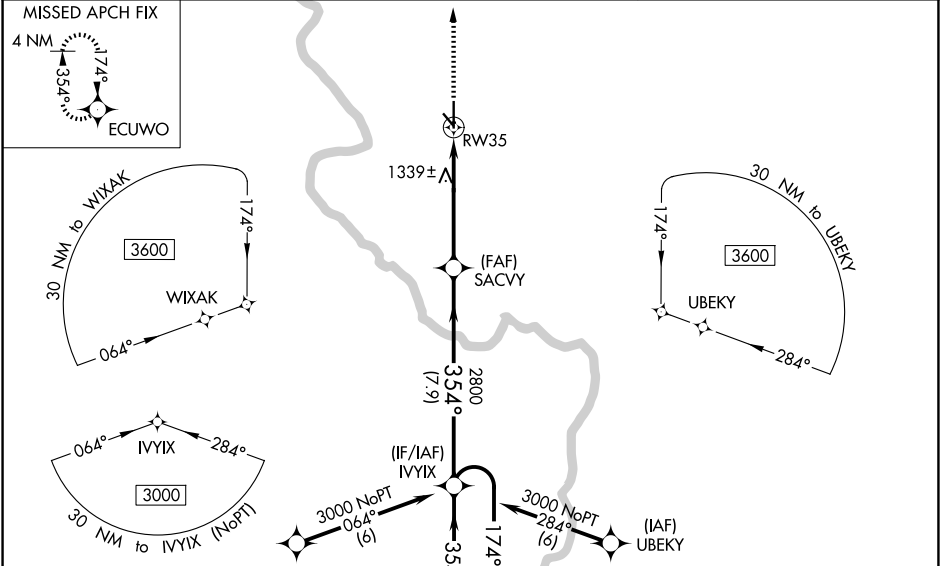

ELEV 1160

TDZE 1155

3600

ECUWO

* LNAV only.

RW35

1.4 NM

3.6 NM

7.9 NM

SACVY

2800

IVYIX

4 NM Holding Pattern

174°

354°

6000

3000

GP 3.00°

TCH 54

CATEGORY	A	B	C	D
LPV DA	1405-¾	250 (300-¾)		NA
LNAV/VNAV DA	1453-1	298 (300-1)		NA
LNAV MDA	1640-1	485 (500-1)	1640-1⅜ 485 (500-1⅜)	NA
CIRCLING	1680-1	520 (600-1)	1680-1½ 520 (600-1½)	NA

MIRL Rwy 13-31 0

HIRL Rwy 17-35 0

REIL Rwy 17 and 35 0

31

35

3506 X 100

1230

3137 X 35

0.3% UP

354°