
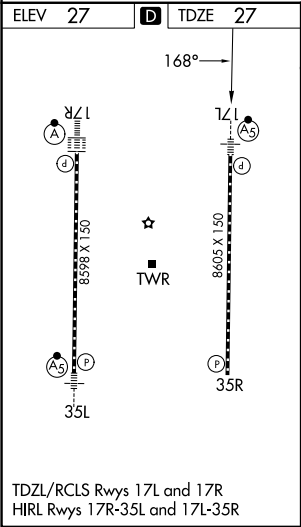


WAAS CH 78327 W17B	APP CRS 168°	Rwy Ldg TDZE Apt Elev 8605 27 27
--	------------------------	--

RNAV (GPS) Y RWY 17L
SACRAMENTO INTL (SMF)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct ORRCA and hold.
⚠ Circling NA west of Rwy 17L-35R. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV C/D visibility to RVR 5500.		

D-ATIS 126.75	NORCAL APP CON 125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	CAPITOL TOWER 125.7 256.7	GND CON 121.7 256.7
-------------------------	--	-------------------------------------	-------------------------------

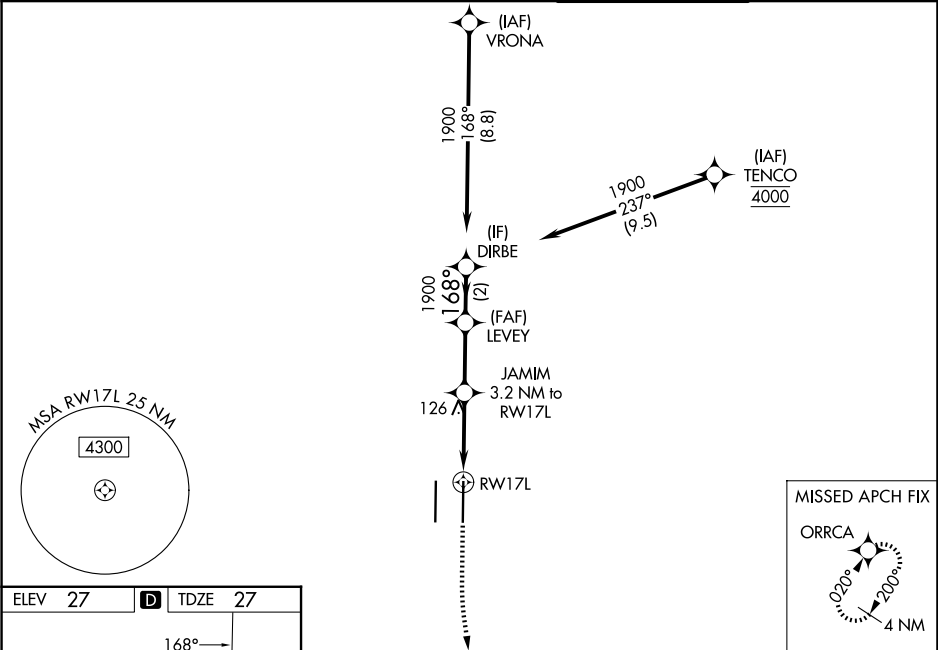

500

3000

ORRCA

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 64).

LEVEY

DIRBE

0.9 NM to RW17L

0.9 NM

2.3 NM

2.5 NM

2 NM

JAMIM
3.2 NM to RW17L

1900

168°

1900

GP 3.00°
TCH 55

1080

1900

CATEGORY	A	B	C	D
LPV DA	227/18 200 (200-½)			
LNAV/VNAV DA	277/24 250 (300-½)			
LNAV MDA	380/24 353 (400-½)	380/30 353 (400-¾)		
CIRCLING	400-1 373 (400-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	840-2¾ 813 (900-2¾)

SW-2, 22 JAN 2026 to 19 FEB 2026

SW-2, 22 JAN 2026 to 19 FEB 2026