

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>77601</b><br><b>W06A</b> | APP CRS<br><b>059°</b> | Rwy Idg<br>TDZE <b>831</b><br>Apt Elev <b>839</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 6

ANN ARBOR MUNI (ARB)

RNP APCH.




▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP and Baro-VNAV NA when using Willow Run altimeter setting. When local altimeter setting not received, use Willow Run altimeter setting and increase all DA/MDA 40 feet; increase LNAV Cats C and D visibility ½ SM.

MISSED APPROACH: Climb to 3000 direct VAQOL and hold.

|                       |                                        |                                            |                         |                          |                        |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|--------------------------|------------------------|
| ATIS<br><b>134.55</b> | DETROIT APP CON<br><b>118.95 284.0</b> | ANN ARBOR TOWER ★<br><b>120.3 (CTAF) 0</b> | GND CON<br><b>121.6</b> | CLNC DEL<br><b>121.6</b> | UNICOM<br><b>123.0</b> |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|--------------------------|------------------------|

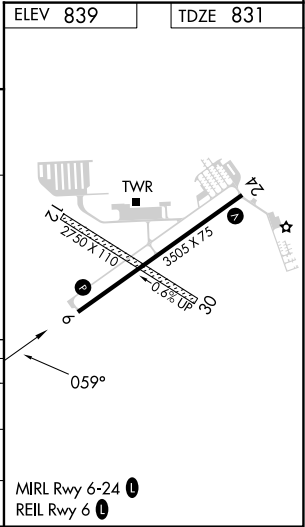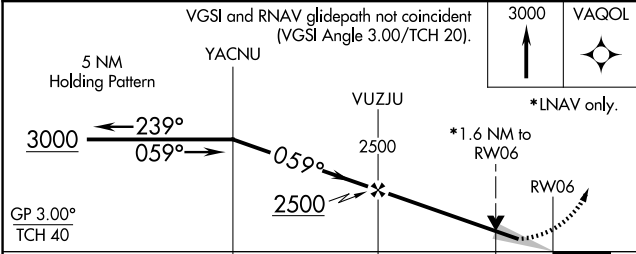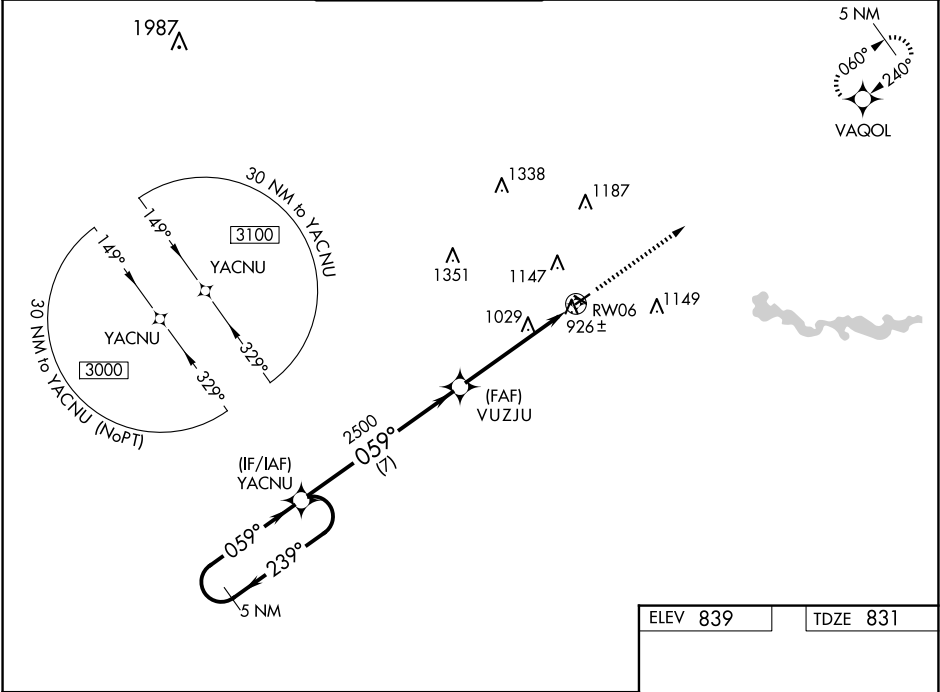

| CATEGORY     | A      | B           | C       | D            |
|--------------|--------|-------------|---------|--------------|
| LPV DA       | 1081-1 | 250 (300-1) |         |              |
| LNAV/VNAV DA | 1097-1 | 266 (300-1) |         |              |
| LNAV MDA     | 1360-1 | 529 (600-1) | 1360-1½ | 529 (600-1½) |