


WAAS CH 70340 W36A	APP CRS 358°	Rwy Idg TDZE Apt Elev	5001 617 622
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

MID-AMERICA INDUSTRIAL (H71)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3800 direct ROBDE and hold, continue climb-in-hold to 3800.
Rwy 36 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Procedure NA at night.	

AWOS 3-PT 120.1	TUL ASOS 124.9 377.2	TULSA APP CON 119.1 360.825	UNICOM 122.8 (CTAF) ①
---------------------------	--------------------------------	---------------------------------------	---------------------------------

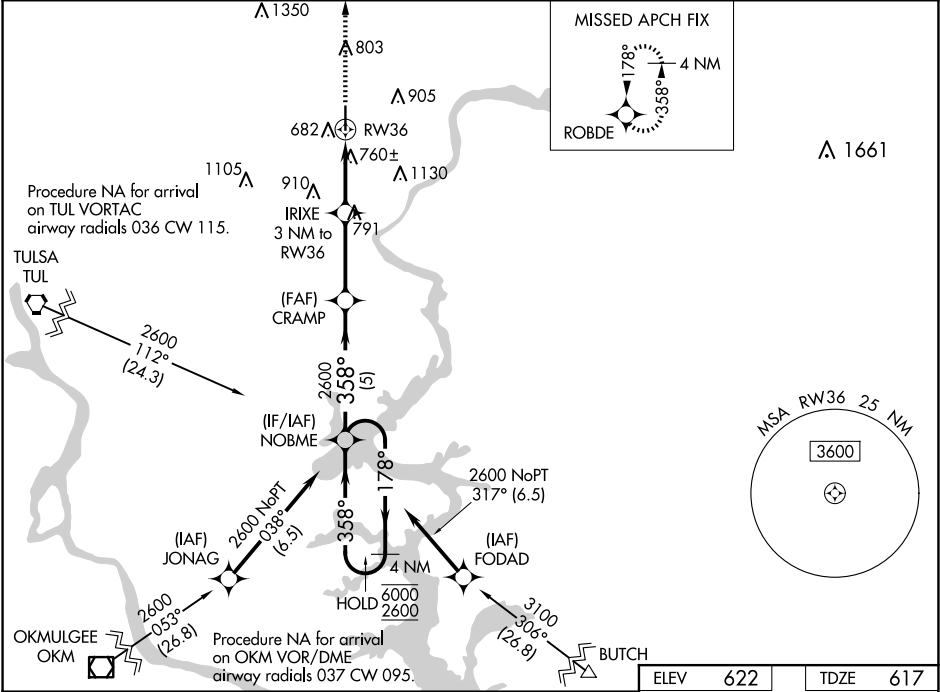

4 NM Holding Pattern	NOBME	CRAMP	IRIXE 3 NM to RW36	3800 ROBDE
GP 3.00° TCH 40	6000 2600	358°	2600	1600
5 NM	3.1 NM	3 NM		
CATEGORY	A	B	C	D
LPV DA	938-1½ 321 (400-1½)			
LNAV/VNAV DA	1131-1½ 514 (600-1½)			
LNAV MDA	1100-1	483 (500-1)	1100-1½ 483 (500-1½)	
CIRCLING	1200-1	578 (600-1)	1560-2¾ 938 (1000-2¾)	1560-3 938 (1000-3)
REIL Rwy 18 and 36 ① MIRL Rwy 18-36 ①				