

APP CRS
257°

Rwy Ldg
10000

TDZE
27

Apt Elev
30

RNAV (RNP) Y RWY 26
JACKSONVILLE INTL (JAX)


RNP AR APCH-GPS.

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 2000 on track 257° to UDAQI and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6
------------------	-------------------------------------	-----------------------------------	------------------------

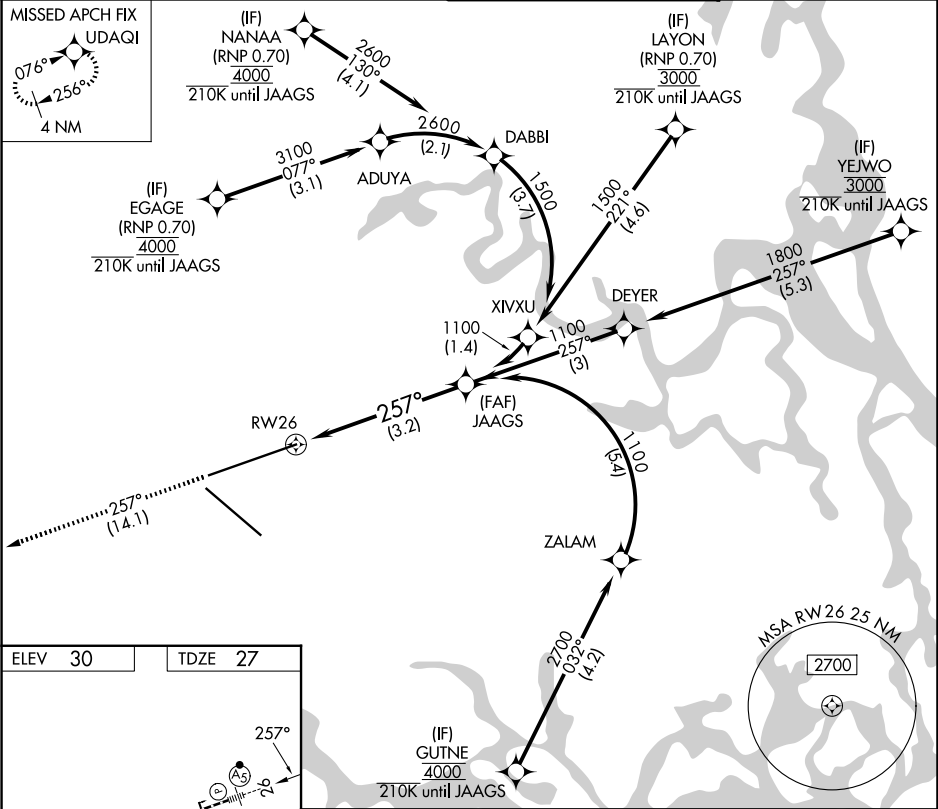

ELEV 30

TDZE 27

257°

10000 X 150

7701 X 150

TWR

AS

AS

2000

tr 257°

UDAQI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

See planview for multiple IF locations.

RW26

257°

JAAGS 1100

1100

GP 3.00°
TCH 49

3.2 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	419/35 392 (400-5%)			

AUTHORIZATION REQUIRED