


WAAS CH 97626 W26A	APP CRS 257°	Rwy Ldg 10000 TDZE 27 Apt Elev 30
--	------------------------	--

RNAV (GPS) Z RWY 26

JACKSONVILLE INTL (JAX)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500 and increase LNAV Cats C/D visibility to RVR 5500.	MALSR 	MISSED APPROACH: Climb to 2000 direct UDAQI and hold.
--	---	---

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6
-------------------------	--	--	-------------------------------

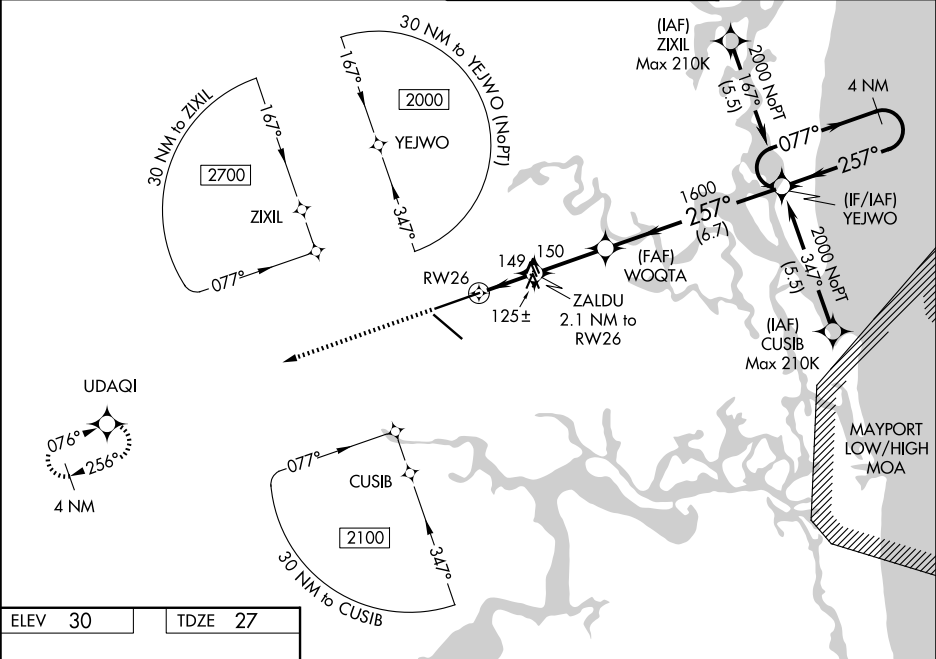

ELEV 30	TDZE 27
---------	---------

