


WAAS CH 97423 W06A	APP CRS 064°	Rwy Idg TDZE Apt Elev	5301 822 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

MEXICO MEML (MYJ)

RNP APCH - GPS.	
▼ ▲ NA Baro-VNAV and VDP NA when using Columbia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Columbia altimeter setting: increase LPV DA to 1146 feet and visibilities ¼ SM; increase LNAV/VNAV DA to 1167 feet and visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅓ SM and Circling visibility Cat C ½ SM.	MISSED APPROACH: Climb to 3000 direct HAPTO and hold.

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9 0
----------------------------	---------------------------------	------------------------

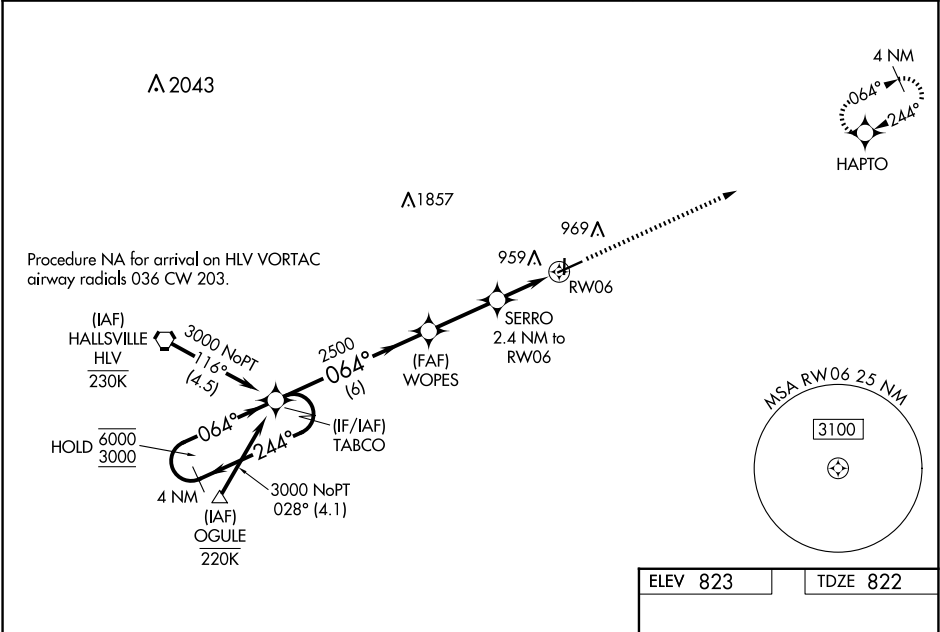

4 NM Holding Pattern		TABCO	WOPES	SERRO	3000	HAPTO
6000		244°	064°	2500	2.4 NM to RW06	1.1 NM to RW06
3000		064°	2500	1640	RW06	
GP 3.00°		6 NM	2.7 NM	1.4 NM	1.1 NM	
TCH 40						
CATEGORY	A	B	C	D		
LPV DA	1072-¾		250 (300-¾)	NA		
LNAV/VNAV DA	1093-⅞		271 (300-⅞)	NA		
LNAV MDA	1200-1		378 (400-1)	NA		
CIRCLING	1280-1		457 (500-1)	1420-1½ 597 (600-1½)	NA	

REIL Rwy 18 0

MIRL Rwy 6-24 and 18-36 0