

WAAS CH 93536 W09A	APP CRS 094°	Rwy Idg 4004 TDZE 38 Apt Elev 38
--	------------------------	---

RNAV (GPS) RWY 9
WALLACE-PENDER (ACZ)

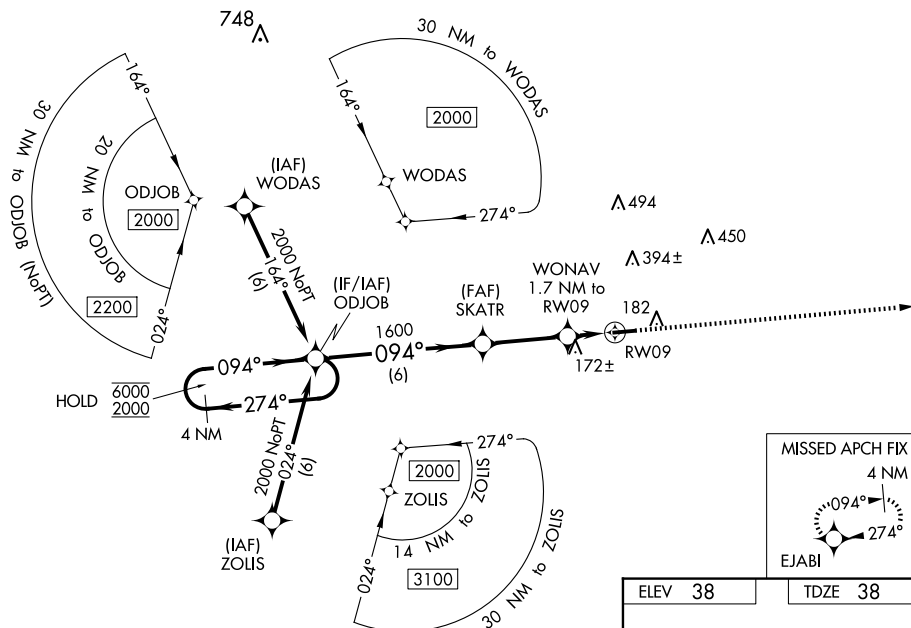
RNP APCH - GPS.

T Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA.
A NA When local altimeter not received, use Kenansville altimeter setting.
 Straight-in and Circling Rwy 9 NA at night.

MISSED APPROACH: Climb to 2000 direct EJAB and hold.

AWOS-3P
121.07

WILMINGTON APP CON★
135.75 317.425

UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX
4 NM
094°
274°
EJABI

ELEV 38

TDZE 38

CATEGORY		A		B		C		D	
LPV	DA			401-1		363 (400-1)			
LNAV/ VNAV	DA			538-1½		500 (500-1½)			
LNAV	MDA	500-1		462 (500-1)		500-1⅔		462 (500-1½)	
C CIRCLING		620-1		582 (600-1)		820-2¼ 782 (800-2¼)		820-2½ 782 (800-2½)	

Technical drawing of a beam with dimensions and annotations. The beam is labeled with the dimensions 4153 X 75. The angle 094° is indicated at the left end. A star symbol is positioned above the beam. The beam is supported by a base, and the distance from the left end to the support is marked as 27. The beam is also labeled with the number 27 at the right end.

MIRL Rwy 9-27 **L**