

WAAS CH 70704 W32A	APP CRS 318°	Rwy Ldg TDZE Apt Elev	5425 20 20
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 32


APALACHICOLA RGNL-CLEVE RANDOLPH FLD (AAF)

RNP APCH - GPS.


▼ Rwy 32 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using ECP altimeter setting.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Straight-in Rwy 32 NA at night. Circling Rwy 6, 18, 24, 32, 36 NA at night. When local altimeter setting not received, use ECP altimeter setting and increase LPV DA to 480 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 527 feet and all visibilities ¾ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 3000 direct ASVOY and hold, continue climb-in-hold to 3000.

ASOS 119.925	TYNDALL APP CON ★ 124.15	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------------	---------------------------------

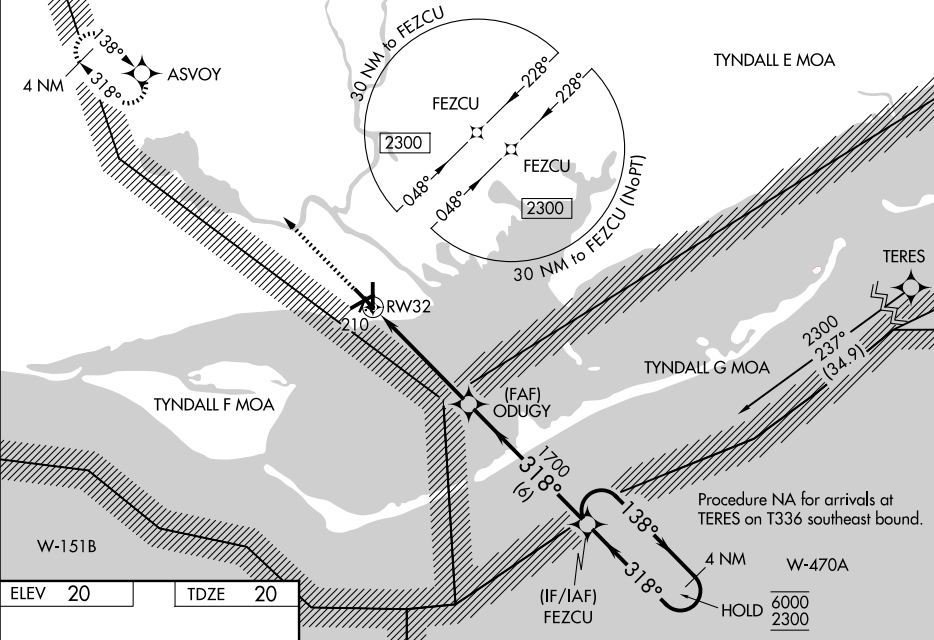

ELEV 20	TDZE 20
---------	---------

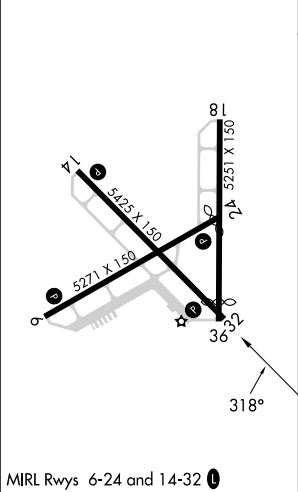

3000

↑

ASVOY

✱

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

ODUGY

1700

FEZCU

4 NM Holding Pattern

138° → 6000

← 318° 2300

GP 3.19° TCH 40

1700

318°

4.8 NM

6 NM

RW32

CATEGORY	A	B	C	D
LPV DA	349-1½ 329 (400-1½)			
LNAV/VNAV DA	396-1 376 (400-1)			
LNAV MDA	460-1	440 (500-1)	460-1¼	440 (500-1¼)
CIRCLING	520-1	500 (500-1)	680-1¾ 660 (700-1¾)	680-2 660 (700-2)