


LOC I-LWB 110.35	APP CRS 045°	Rwy Ldg 7003
		TDZE 2288
		Apt Elev 2302

ILS or LOC RWY 4

GREENBRIER VALLEY (LWB)

RNAV 1-GPS required. ADF or DME required for LOC only.	MALSR 	MISSED APPROACH: Climb to 4000 then climbing left turn to 6000 direct EBALY and hold, continue climb-in-hold to 6000.
Autopilot coupled approach NA below 2700. Rwy 4 helicopter visibility reduction below 3/4 SM NA. For inop ALS increase S-ILS 4 all Cats visibility to 7/8 SM, increase S-LOC 4 Cats A/B to 1 1/8 SM.		

ATIS 121.4	WASHINGTON CENTER 125.725 134.4 353.9	LEWISBURG TOWER ★ 118.9 (CTAF) 0	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

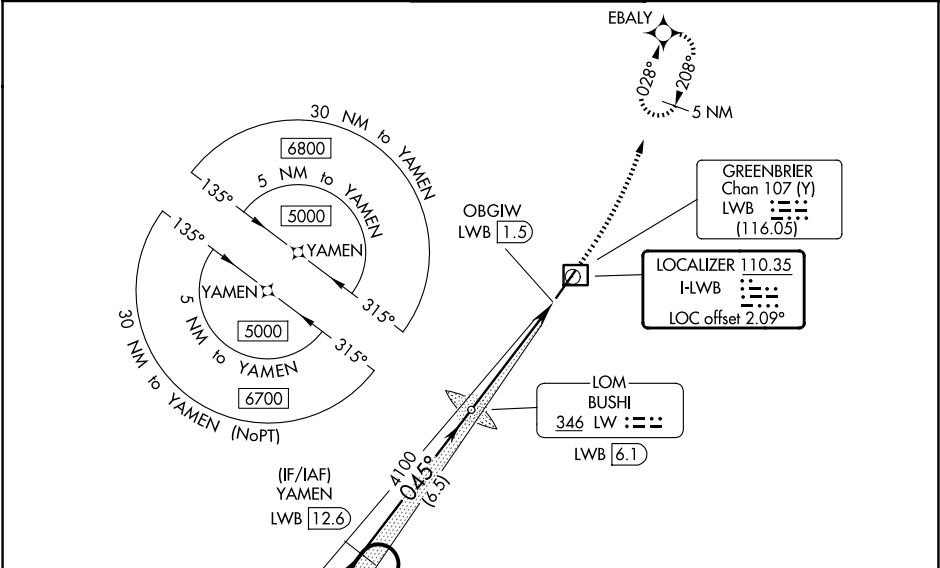

ELEV 2302 D TDZE 2288				
5 NM Holding Pattern YAMEN LWB 12.6 BUSHI LOM LWB 6.1 4000 6000 EBALY 6000 5000 225° 045° 045° 4100 GS 3.00° TCH 51 6.5 NM 3.8 NM 0.8 NM 0.4 *LWB 2.3 *LOC only. OBSGW LWB 1.5 TWR 7003 X 150 REIL Rwy 22 0 HIRL Rwy 4-22 0 FAF to MAP 4.6 NM Knots 60 90 120 150 180 Min:Sec 4:36 3:04 2:18 1:50 1:32				
CATEGORY	A	B	C	D
S-ILS 4		2559-3/4	271 (300-3/4)	
S-LOC 4		2720-3/4	432 (500-3/4)	
CIRCLING	2840-1 538 (600-1)	3040-1 738 (800-1)	3280-3 978 (1000-3)	3680-3 1378 (1400-3)