


WAAS CH 42613 W04A	APP CRS 043°	Rwy Ldg TDZE 2288 Apt Elev 2302
--	------------------------	---

RNAV (GPS) RWY 4

GREENBRIER VALLEY (LWB)

RNP APCH.				MALSR	MISSED APPROACH: Climb to 6300 direct HODFU and hold, continue climb-in-hold to 6300.
▼ ▲ Rwy 4 helicopter visibility reduction below ¾ NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cats A/B visibilities to 1 SM, Cats C/D to 1 ¾ SM, and increase LPV all Cats visibilities to ¾ SM.					
ATIS 121.4	WASHINGTON CENTER 125.725 134.4 353.9		LEWISBURG TOWER ★ 118.9 (CTAF) 0	GND CON 121.9	UNICOM 122.95

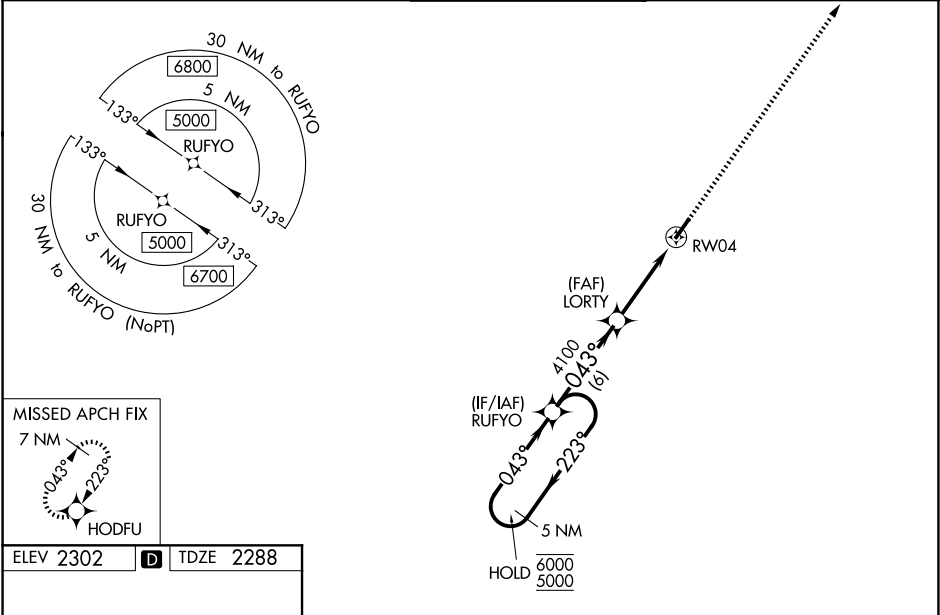

ELEV 2302 D TDZE 2288		5 NM Holding Pattern		6300	HODFU
		RUFYO		*LNAV only.	
GP 3.00° TCH 51		LORTY		*1.3 NM to RW04	
6000 ← 223°		4100		RW04	
5000 → 043°		6 NM		4.2 NM	
		1.3			
CATEGORY	A	B	C	D	
LPV DA	2559-¾	271 (300-¾)			
LNAV/VNAV DA	2738-⅞	450 (500-⅞)			
LNAV MDA	2760-¾ 472 (500-¾)	2760-1 472 (500-1)			
CIRCLING	2840-1 538 (600-1)	3040-1 738 (800-1)	3280-3 978 (1000-3)	3680-3 1378 (1400-3)	