


WAAS CH 81927 W07A	APP CRS 073°	Rwy Ldg TDZE Apt Elev	4491 730 730
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

WILLIAMS COUNTY (ØG6)

▼ ▲NA	Baro-VNAV NA. When VGSI inop, Straight-in/Circling Rwy 7 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Defiance Meml altimeter setting; when not received, use Auburn/Dekalb Exec altimeter setting: increase LPV DA to 1063 and all visibilities ¼ SM, LNAV/VNAV DA to 1300 and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct ROYYS and hold.
----------------------	--	--

DFI ASOS 121.425	TOLEDO APP CON 134.35 307.0	UNICOM 122.8 (CTAF)	123.0 
----------------------------	---------------------------------------	-------------------------------	--

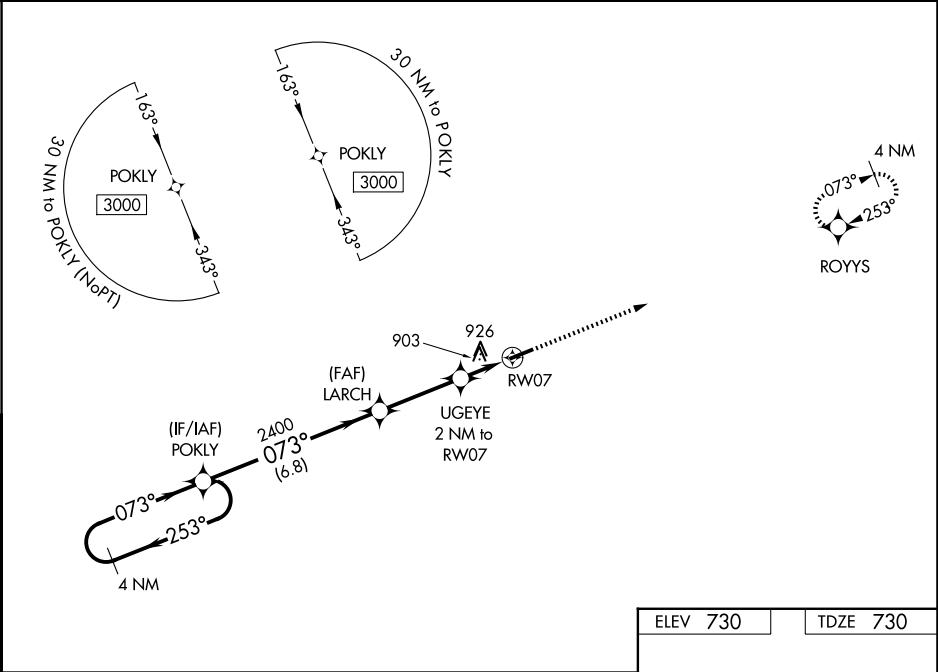

4 NM Holding Pattern		POKLY		LARCH		UGEYE 2 NM to RW07		RW07	
3000 ← 253° 073° →		2400		2400		*1400		*LNAV only	
GP 3.00° TCH 35°		6.8 NM		3.1 NM		2 NM			
CATEGORY	A	B	C	D					
LPV DA	1003-1 273 (300-1)								
LNAV/ VNAV DA	1240-1 ³ / ₄ 510 (600-1 ³ / ₄)								
LNAV MDA	1260-1	530 (600-1)	1260-1 ¹ / ₂	530 (600-1 ¹ / ₂)					
CIRCLING	1300-1	570 (600-1)	1300-1 ¹ / ₂ 570 (600-1 ¹ / ₂)	1520-2 ¹ / ₂ 790 (800-2 ¹ / ₂)					

