

VOR/DME MOX 109.6 Chan 33	APP CRS 315°	Rwy Ldg 4899 TDZE 1130 Apt Elev 1136
---	------------------------	---





VOR RWY 32

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)


T VDP NA when using BBB altimeter setting. When local altimeter setting not received, use BBB altimeter setting and increase all MDAs 60 feet and increase S-32 visibility Cat C $\frac{1}{2}$ SM and Circling visibility Cat C $\frac{1}{4}$ SM; increase JEXIR fix minimums S-32 and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3000 then left turn direct MOX VOR/DME and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) ①
--------------------------	--	---------------------------------




ELEV 1136		TDZE 1130
-----------	--	-----------

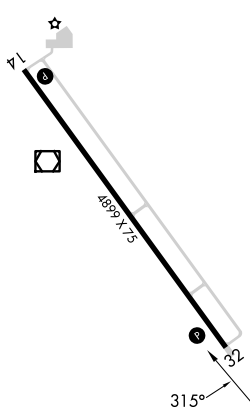HIRL Rwy 14-32 **L**

REIL Rwy 14 and 32 L

Amdt 6A 28NOV24

Amdt 6A 28NOV24

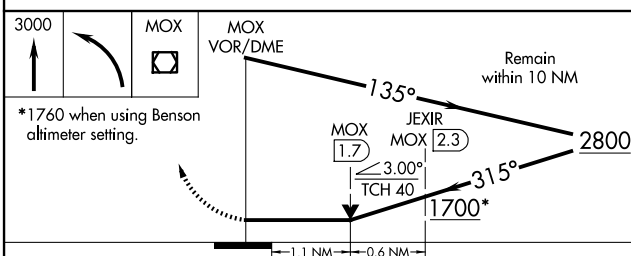

CATEGORY	A	B	C	D
S-32	1700-1	570 (600-1)	1700-1 $\frac{5}{8}$ 570 (600-1 $\frac{5}{8}$)	NA
CIRCLING	1700-1	564 (600-1)	1860-2 724 (800-2)	NA
JEXIR FIX MINIMUMS				
S-32	1500-1 370 (400-1)			NA
CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA

MORRIS, MINNESOTA

Amdt 6A 28NOV24

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

45°34'N-95°58'W

VOR RWY 32