


WAAS CH 82641 W17A	APP CRS 167°	Rwy Ldg TDZE Apt Elev	4000 722 722
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17
FORT MADISON MUNI (F'SW)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BRL altimeter setting. When local altimeter setting not received, use BRL altimeter setting; increase LPV DA to 1004 feet; increase LNAV/VNAV DA to 1004 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cat D ¼ SM.	MISSED APPROACH: Climb to 2600 direct DRIBS and hold.
---	---

AWOS-3 120.925	CHICAGO CENTER 135.6 316.1	UNICOM 122.8 (CTAF) 📶
--------------------------	--------------------------------------	--

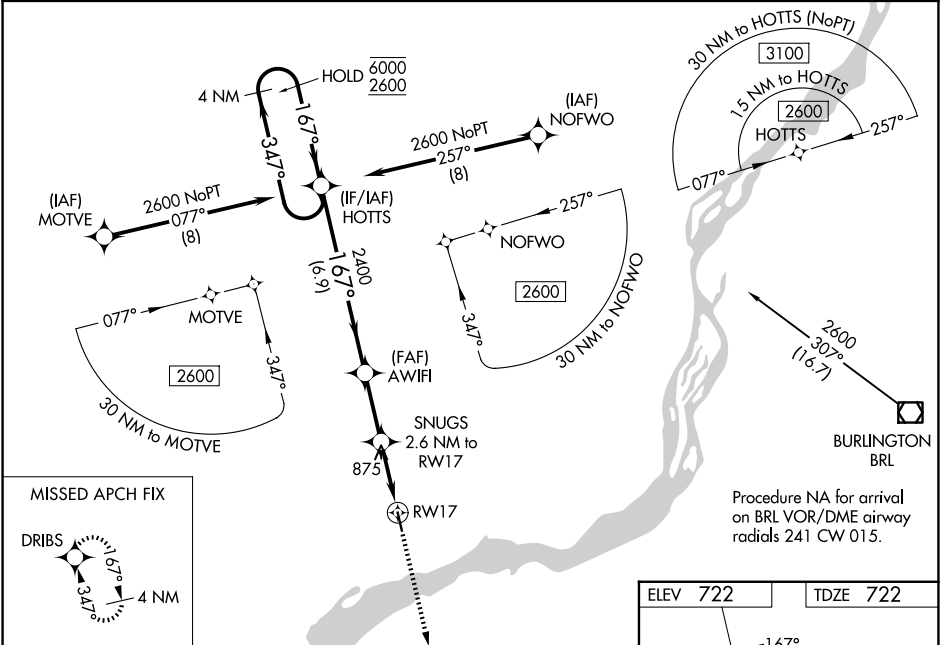

4 NM Holding Pattern 6000 ← 347° 2600 → 167° GP 3.00° TCH 50 HOTTs AWIFI 2400 SNUGS 2.6 NM to RW17 1.2 NM to RW17 RW17 2600 ↑ DRIBS							
6.9 NM		2.5 NM		1.4 NM		1.2 NM	
CATEGORY	A		B		C		D
LPV DA	972-1 250 (300-1)						
LNAV/VNAV DA	972-1 250 (300-1)						
LNAV MDA	1140-1	418 (500-1)			1140-1½	418 (500-1½)	
CIRCLING	1200-1	478 (500-1)			1260-1½ 538 (600-1½)	1500-2½ 778 (800-2½)	

