

LOC/DME I-CH	APP CRS	Rwy Ldg
111.5	004°	5000
Chan 52		343
		343

ILS or LOC RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

DME required.

▼


NA

VDP NA when using LFK alimeter setting. Autopilot coupled approach NA below 740. When local alimeter setting not received, use LFK alimeter setting: Increase S-ILS 36 DA to 598 feet; increase all MDAs 60 feet and S-LOC 36 visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM. Localizer unusable inside 0.3 NM from threshold.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2400 direct LFK VORTAC and hold.

AWOS-3PT	HOUSTON CENTER	UNICOM
135.625	125.175 285.575	123.0 (CTAF)

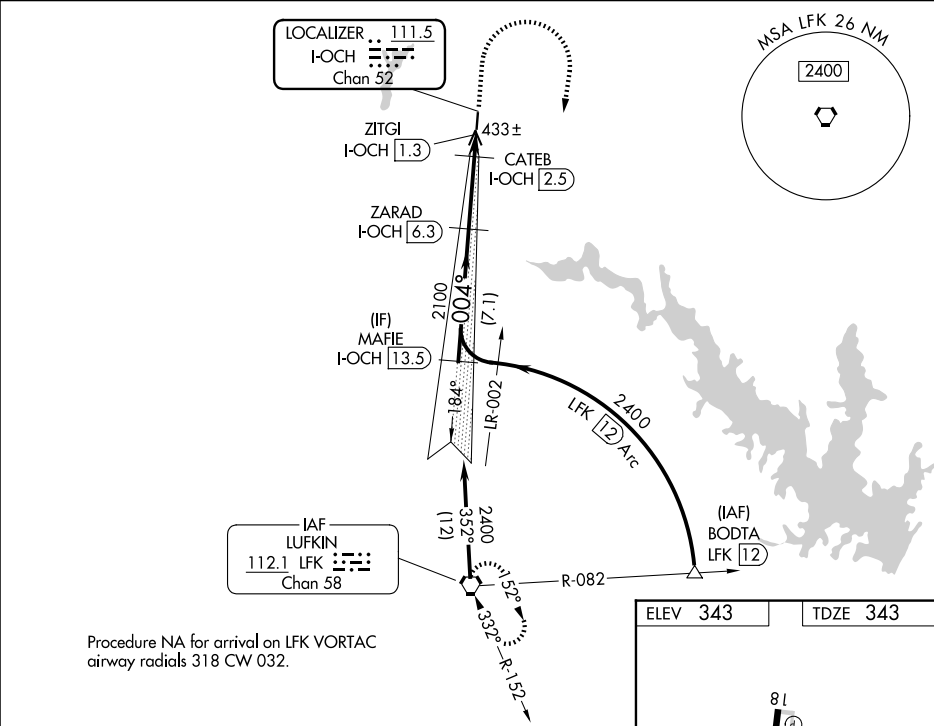

	MAFIE I-CH 13.5	ZARAD I-CH 6.3	CATEB I-CH 2.5	I-CH 2	ZITGI I-CH 1.3	
	2400	2100	2100	860		
	GS 3.00° TCH 53					
	7.1 NM	3.9 NM	0.5 NM	0.7 NM	0.3	
CATEGORY	A	B	C	D		
S-ILS 36	543-½	200 (200-½)		NA		
S-LOC 36	700-½	357 (400-½)	700-⅝ 357 (400-⅝)	NA		
CIRCLING	860-1	517 (600-1)	1080-2 737 (800-2)	NA		

