

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-ASN | APP CRS | Rwy Idg  | 6032 |
| 109.95        | 038°    | TDZE     | 511  |
| Chan 36(Y)    |         | Apt Elev | 529  |

ILS Z or LOC Z RWY 4

TALLADEGA MUNI (ASN)


▼

▲NA

DME required. VDP NA with Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 744 feet and all MDA 40 feet; increase S-LOC 4 Cat C/D ½ mile and Circling Cat C ¼ mile.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3700 on heading 242° and on VUZ VORTAC R-095 to JOTAV INT/VUZ 30 DME and hold.

|          |                    |                |
|----------|--------------------|----------------|
| AWOS-3PT | BIRMINGHAM APP CON | UNICOM         |
| 118.425  | 132.15 285.45      | 122.8 (CTAF) 0 |

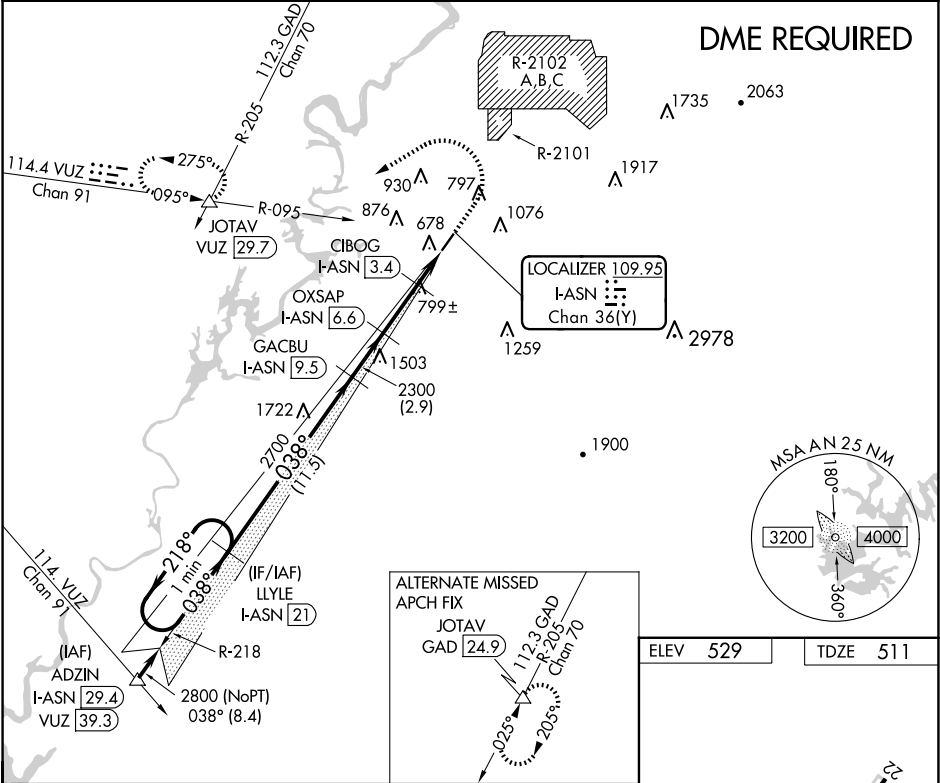

|                                                                 |                       |                       |                         |                        |
|-----------------------------------------------------------------|-----------------------|-----------------------|-------------------------|------------------------|
| VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 65). |                       |                       |                         |                        |
| One Minute Holding Pattern                                      |                       |                       |                         |                        |
| *LOC only.                                                      |                       |                       |                         |                        |
| 2800 ← 218° 038° → 2700 2300 2300 *1280                         |                       |                       |                         |                        |
| GS 3.00° TCH 45                                                 |                       |                       |                         |                        |
| 11.5 NM 2.9 3.2 NM 0.8 1.5 NM                                   |                       |                       |                         |                        |
| CATEGORY                                                        | A                     | B                     | C                       | D                      |
| S-ILS 4                                                         | 711-¾ 200 (200-¾)     |                       |                         |                        |
| S-LOC 4                                                         | 1060-1                | 549 (600-1)           | 1060-1½                 | 549 (600-1½)           |
| CIRCLING                                                        | 1140-1<br>611 (700-1) | 1180-1<br>651 (700-1) | 1380-2½<br>851 (900-2½) | 1500-3<br>971 (1000-3) |