

WAAS CH 40336 W04A	APP CRS 043°	Rwy Idg TDZE 92 Apt Elev 92	4505
--	------------------------	---	-------------



RNAV (GPS) RWY 4

MARION COUNTY (MAO)

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local glimeter setting not received, use Florence glimeter setting and increase all DA 53 feet and all visibilities ¼ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH:
Climb to 2000 direct
SEROY and hold.

AWOS-3PT 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

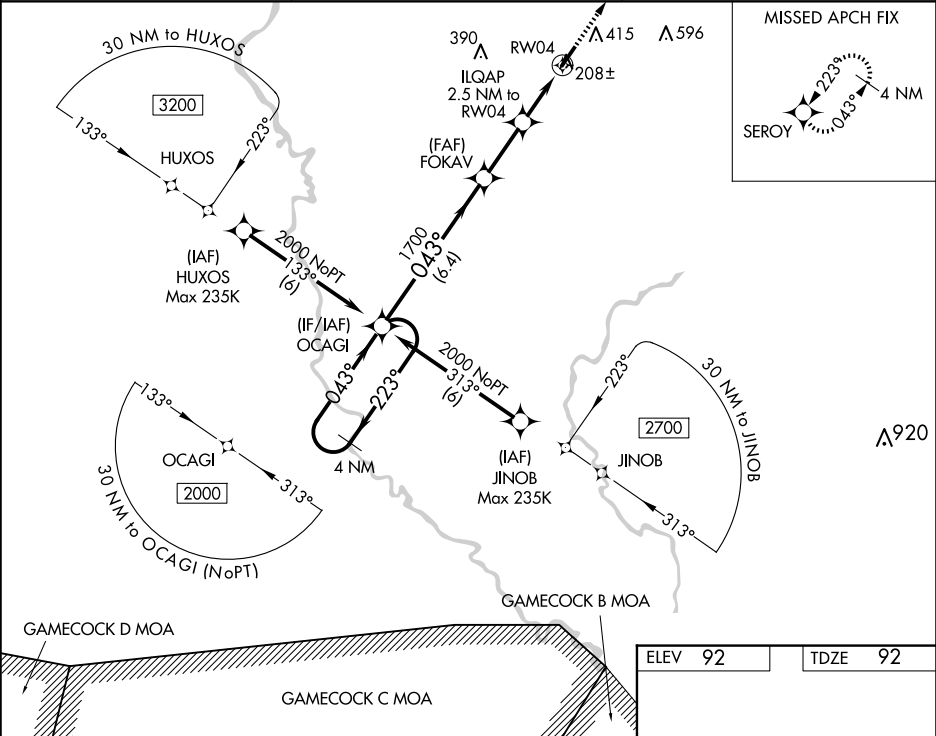

4 NM Holding Pattern		OCAGI		2000	SEROY
← 223°		→ 043°		1700	*LNAV only.
GP 3.00° TCH 39		FOKAV		ILQAP 2.5 NM to RW04	
		1700		RW04	
		*920			
		6.4 NM		2.4 NM	2.5 NM
CATEGORY	A	B	C	D	
LPV DA	342-7⁄8	250 (300-7⁄8)	342-1	250 (300-1)	
LNAV/VNAV DA	369-7⁄8	277 (300-7⁄8)	369-1	277 (300-1)	
LNAV MDA	460-1		368 (400-1)		
CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)	

