

DESTIN, FLORIDA

AL-5680 (FAA)

25107


WAAS CH 48923 W14A	APP CRS 143°	Rwy Idg 5001 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 14
DESTIN EXEC (DTS)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Crestview altimeter setting. Rwy 14 helicopter visibility reduction below 3/4 SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crestview altimeter setting and increase all DA/MDA 80 feet; increase LPV all Cats visibility 1/2 SM, LNAV/VNAV all Cats visibility 3/4 SM, increase LNAV Cats C and D 1/2 SM, and Circling Cats C and D 1/4 SM.

MISSED APPROACH:
Climb to 2000 direct
AJUP and hold.

ATIS 133.925	EGLN APP CON 132.1 360.6	DESTIN TOWER ★ 118.45 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6 377.2	CLNC DEL 127.7 (When twr closed)
------------------------	------------------------------------	--	-------------------------	--------------------------------	---

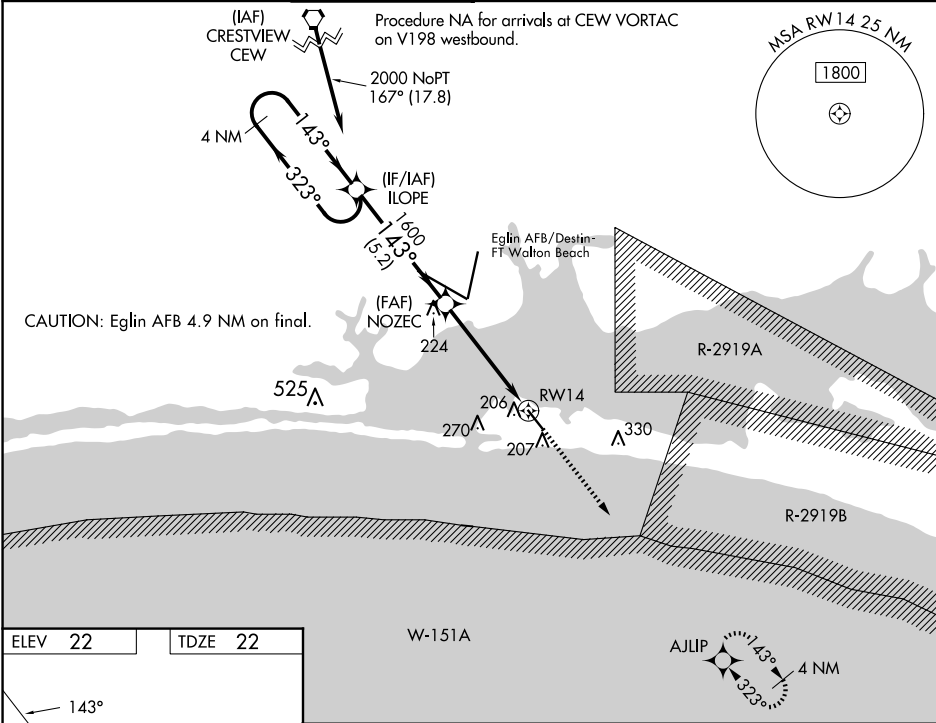

ELEV 22	TDZE 22
---------	---------

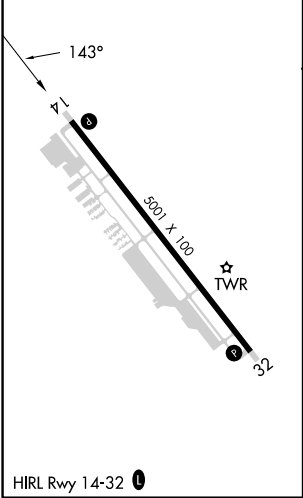

4 NM Holding Pattern ILOPE		2000	323°	143°	1600	NOZEC	1600	143°	1600	5.2 NM	3.6 NM	1.2 NM	RWY 14	2000	AJUP
GP 3.00° TCH 43		*LNAV only.													
CATEGORY	A	B	C	D											
LPV DA	272-1		250 (300-1)												
LNAV/VNAV DA	367-1 1/8		345 (400-1 1/8)												
LNAV MDA	460-1		438 (500-1)		460-1 1/4		438 (500-1 1/4)								
CIRCLING	580-1		558 (600-1)		680-1 3/4		658 (700-1 3/4)		680-2		658 (700-2)				

DESTIN, FLORIDA
Amdt 2C 07DEC17

30°24'N-86°28'W

DESTIN EXEC (DTS)
RNAV (GPS) RWY 14

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026