

WAAS
CH **63124**
W05A

APP CRS
050°

Rwy Ldg
TDZE
847

Apt Elev
847

RNAV (GPS) RWY 5

SHELBY-CLEVELAND COUNTY RGNL (EHO)

RNP APCH - GPS.

▼

⚠


Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLT altimeter setting. When local altimeter setting not received, use CLT altimeter setting and increase LPV DA to 1187 feet. Increase LNAV/VNAV DA to 1203 feet. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 4000 direct JIRUL and on track 046° to LINCO and hold.

AWOS-3
118.425

CHARLOTTE APP CON
120.05 257.2

UNICOM
122.8 (CTAF) 0

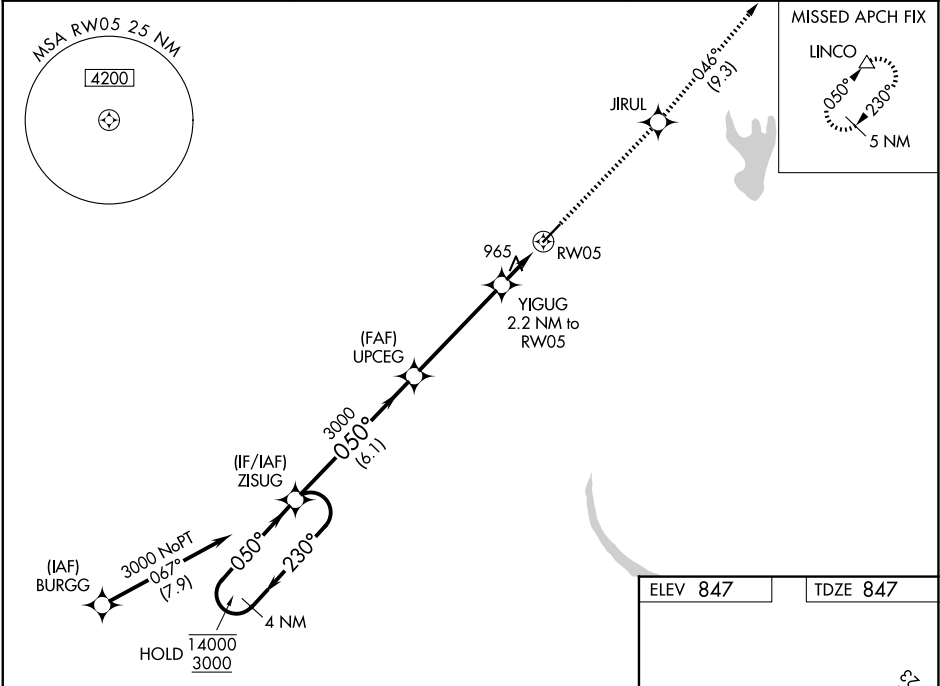

4 NM Holding Pattern

ZISUG

UPCEG

JIRUL

LINCO

14000
3000

GP 3.00°
TCH 41

230°

050°

050°

3000

1560

4000

YIGUG 2.2 NM to RWY 5

1.1 NM to RWY 5

RWY 5

5001 X 100

050°

CATEGORY

A

B

C

D

LPV DA

1097-1

250 (300-1)

LNAV/VNAV DA

1113-1

266 (300-1)

LNAV MDA

1240-1

393 (400-1)

1240-1½

393 (400-1½)

MIRL Rwy 5-23 0